

Official Journal of the European Union

L 9



English edition

Legislation

Volume 63

15 January 2020

Contents

II *Non-legislative acts*

REGULATIONS

- ★ **Commission Implementing Regulation (EU) 2020/29 of 14 January 2020 concerning the non-approval of *Vitis vinifera* cane tannins as a basic substance in accordance with Regulation (EC) No 1107/2009 of the European Parliament and of the Council concerning the placing of plant protection products on the market ⁽¹⁾** 1
- ★ **Commission Implementing Regulation (EU) 2020/30 of 14 January 2020 amending Implementing Regulation (EU) No 404/2011 as regards detailed rules for the direct electronic exchange of information enacted under the rules of the Common Fisheries Policy** 3

ACTS ADOPTED BY BODIES CREATED BY INTERNATIONAL AGREEMENTS

- ★ **UN Regulation No 53 — Uniform provisions concerning the approval of category L₃ vehicles with regard to the installation of lighting and light-signalling devices [2020/31]** 6
- ★ **UN Regulation No 74 — Uniform provisions concerning the approval of category L₁ vehicles with regard to the installation of lighting and light-signalling devices [2020/32]** 46

Corrigenda

- ★ **Corrigendum to Council Decision (EU) 2019/1355 of 15 July 2019 on the position to be taken on behalf of the European Union in the EPA Committee established under the stepping stone Economic Partnership Agreement between Côte d'Ivoire, of the one part, and the European Community and its Member States, of the other part, as regards the adoption of Protocol 1 concerning the definition of the concept of 'originating products' and methods of administrative cooperation (OJ L 222, 26.8.2019)** 72

⁽¹⁾ Text with EEA relevance.

★ Corrigendum to Commission Implementing Decision (EU) 2019/2193 of 17 December 2019 laying down rules for the calculation, verification and reporting of data and establishing data formats for the purposes of Directive 2012/19/EU of the European Parliament and of the Council on waste electrical and electronic equipment (WEEE) (OJ L 330, 20.12.2019)	73
--	----

II

(Non-legislative acts)

REGULATIONS

COMMISSION IMPLEMENTING REGULATION (EU) 2020/29

of 14 January 2020

concerning the non-approval of *Vitis vinifera* cane tannins as a basic substance in accordance with Regulation (EC) No 1107/2009 of the European Parliament and of the Council concerning the placing of plant protection products on the market

(Text with EEA relevance)

THE EUROPEAN COMMISSION,

Having regard to the Treaty on the Functioning of the European Union,

Having regard to Regulation (EC) No 1107/2009 of the European Parliament and of the Council of 21 October 2009 concerning the placing of plant protection products on the market and repealing Council Directives 79/117/EEC and 91/414/EEC ⁽¹⁾, and in particular Article 23(5) in conjunction with Article 13(2) thereof,

Whereas:

- (1) On 30 June 2017, the Commission received an application from Biomolécules et Biotechnologies Végétales (BBV) EA2106 and Institut Technique de l'Agriculture Biologique (ITAB) for the approval of *Vitis vinifera* cane tannins as a basic substance. That application was accompanied by the information required under the second subparagraph of Article 23(3) of Regulation (EC) No 1107/2009.
- (2) The Commission asked the European Food Safety Authority ('the Authority') for scientific assistance. The Authority provided the Commission with a technical report on *Vitis vinifera* cane tannins on 2 May 2018 ⁽²⁾. The Commission presented the review report ⁽³⁾ and the draft of this Regulation on the non-approval of *Vitis vinifera* cane tannins to the Standing Committee on Plants, Animals, Food and Feed on 24 June 2019 and finalised them for the meeting of that Committee on 22 October 2019.
- (3) The documentation provided by the applicants do not show that *Vitis vinifera* cane tannins fulfils the criteria of a foodstuff as defined in Article 2 of Regulation (EC) No 178/2002 of the European Parliament and of the Council ⁽³⁾.
- (4) Specific concerns were identified, in the technical report of the Authority, regarding *Vitis vinifera* cane tannins. No toxicological assessment was available for *Vitis vinifera* cane tannins used as a plant protection product, especially as regards the protection of children. This applies to the estimation of the non-dietary exposure risk assessment, in particular bystanders and residents. Furthermore, there was insufficient information for performing an environmental risk assessment for the substance.
- (5) No relevant evaluation, carried out in accordance with other Union legislation as referred to in Article 23(2) of Regulation (EC) No 1107/2009, was available.

⁽¹⁾ OJ L 309, 24.11.2009, p. 1.

⁽²⁾ EFSA (European Food Safety Authority), 2017. Technical report on the outcome of the consultation with Member States and EFSA on the basic substance application for *Vitis vinifera* cane tannins for use in plant protection as protectant and repellent. EFSA supporting publication 2018:EN-1414. 46 pp. doi: 10.2903/sp.efsa.2018.EN-1414.

⁽³⁾ <http://ec.europa.eu/food/plant/pesticides/eu-pesticides-database/public/?event=activesubstance.selection&language=EN>

⁽³⁾ Regulation (EC) No 178/2002 of the European Parliament and of the Council of 28 January 2002 laying down the general principles and requirements of food law, establishing the European Food Safety Authority and laying down procedures in matters of food safety (OJ L 31, 1.2.2002, p. 1).

- (6) The Commission invited the applicants to submit their comments on the technical report of the Authority and on the Commission's draft review report. The applicants did not submit comments.
- (7) Consequently, as laid down in the Commission's review report, it has not been established that the requirements laid down in Article 23 of Regulation (EC) No 1107/2009 are satisfied. It is therefore appropriate not to approve *Vitis vinifera* cane tannins as a basic substance.
- (8) This Regulation does not prejudice the submission of a further application for the approval of *Vitis vinifera* cane tannins as a basic substance in accordance with Article 23(3) of Regulation (EC) No 1107/2009.
- (9) The measures provided for in this Regulation are in accordance with the opinion of the Standing Committee on Plants, Animals, Food and Feed,

HAS ADOPTED THIS REGULATION:

Article 1

Vitis vinifera cane tannins is not approved as a basic substance.

Article 2

This Regulation shall enter into force on the twentieth day following that of its publication in the *Official Journal of the European Union*.

This Regulation shall be binding in its entirety and directly applicable in all Member States.

Done at Brussels, 14 January 2020.

For the Commission

The President

Ursula VON DER LEYEN

COMMISSION IMPLEMENTING REGULATION (EU) 2020/30**of 14 January 2020****amending Implementing Regulation (EU) No 404/2011 as regards detailed rules for the direct electronic exchange of information enacted under the rules of the Common Fisheries Policy**

THE EUROPEAN COMMISSION,

Having regard to the Treaty on the Functioning of the European Union,

Having regard to Council Regulation (EC) No 1224/2009 of 20 November 2009 establishing a Union control system for ensuring compliance with the rules of the common fisheries policy, amending Regulations (EC) No 847/96, (EC) No 2371/2002, (EC) No 811/2004, (EC) No 768/2005, (EC) No 2115/2005, (EC) No 2166/2005, (EC) No 388/2006, (EC) No 509/2007, (EC) No 676/2007, (EC) No 1098/2007, (EC) No 1300/2008, (EC) No 1342/2008 and repealing Regulations (EEC) No 2847/93, (EC) No 1627/94 and (EC) No 1966/2006 ⁽¹⁾, and in particular Articles 71, 76 and 111 thereof,

Whereas:

- (1) Rules governing the exchange of data in electronic format between Member States, and between Member States and the Commission or the body designated by it were established in Regulation (EC) No 1224/2009 ('the Control Regulation'). Articles 71, 76 and 83 of that Regulation specifically concern the exchange of inspection and surveillance reports.
- (2) The Commission has developed a new format for the transmission of inspection and surveillance report data that should be used for all future electronic data exchanges referred to in Articles 71, 76 and 83 of the Control Regulation.
- (3) Chapter Ia of Title IX of Commission Implementing Regulation (EU) No 404/2011 ⁽²⁾ lays down the rules governing the exchange of data between Member States, and between Member States and the Commission or the body designated by it. These rules need to be modified in order to take account of the new format developed by the Commission for inspection and surveillance data as well as new technologies and international standards.
- (4) Since Council Regulation (EC) No 1006/2008 ⁽³⁾ has been repealed by Regulation (EU) 2017/2403 of the European Parliament and of the Council ⁽⁴⁾, references to this Regulation in Chapter Ia of Title IX of Implementing Regulation (EU) No 404/2011 should be removed.
- (5) Implementing Regulation (EU) No 404/2011 should therefore be amended accordingly.
- (6) The measures provided for in this Regulation are in accordance with the opinion of the Committee for Fisheries and Aquaculture,

⁽¹⁾ OJ L 343, 22.12.2009, p. 1.

⁽²⁾ Commission Implementing Regulation (EU) No 404/2011 of 8 April 2011 laying down detailed rules for the implementation of Council Regulation (EC) No 1224/2009 establishing a Community control system for ensuring compliance with the rules of the Common Fisheries Policy (OJ L 112, 30.4.2011, p. 1).

⁽³⁾ Council Regulation (EC) No 1006/2008 of 29 September 2008 concerning authorisations for fishing activities of Community fishing vessels outside Community waters and the access of third country vessels to Community waters, amending Regulations (EEC) No 2847/93 and (EC) No 1627/94 and repealing Regulation (EC) No 3317/94 (OJ L 286, 29.10.2008, p. 33).

⁽⁴⁾ Regulation (EU) 2017/2403 of the European Parliament and of the Council of 12 December 2017 on the sustainable management of external fishing fleets, and repealing Council Regulation (EC) No 1006/2008 (OJ L 347, 28.12.2017, p. 81).

HAS ADOPTED THIS REGULATION:

Article 1

Amendments to Implementing Regulation (EU) No 404/2011

Implementing Regulation (EU) No 404/2011 is amended as follows:

- (a) Article 146a is replaced by the following:

'Article 146a

This Chapter lays down detailed rules for the exchange of data as referred to in Articles 111 and 116 of the Control Regulation, the exchange of inspection and surveillance report data as referred to in Articles 71, 76 and 83 of the Control Regulation, as well as for the notification of catch data as referred to in Article 33(2) and (4) of the Control Regulation.'

- (b) In Article 146i, paragraph 1 is replaced by the following:

'1. Flag Member States shall use the XML Schema Definition based on the UN/CEFACT P1000-12 as format to transmit to the Commission the aggregated catch data referred to in Article 33(2) and (4) of the Control Regulation.'

- (c) In Article 146i, paragraph 3 is replaced by the following:

'3. The catch report quantities shall be based on the quantities landed. If catches are not yet landed, an estimate catch report shall be provided, with the indication 'retained on board'. A correction with the exact weight and landing place shall be transmitted before the 15th of the month following the landing.'

- (d) In Article 146j, paragraph 1 is replaced by the following:

'1. Amendments to XML formats and implementation documents to be used for all electronic data exchanges between Member States, and between Member States, the Commission or the body designated by it, including the amendments resulting from Articles 146f, 146g, 146h and 146k, shall be decided by the Commission in concert with Member States.'

- (e) The following Article 146k is added:

'Article 146k

Exchange of inspection and surveillance related data

1. The format to be used to exchange inspection and surveillance report data, referred to in Articles 71, 76 and 83 of the Control Regulation, between Member States, as well as between Member States and the Commission or the body designated by it, shall be the Inspection and Surveillance Domain XML Schema Definition based on the UN/CEFACT P1000-8.

2. As from a date established in concert with Member States in accordance with Article 146j(2), Member State systems shall be capable of sending inspection and surveillance messages and of replying to requests for inspection and surveillance data in accordance with the Inspection and Surveillance Domain XML Schema Definition based on the UN/CEFACT P1000-8.'

- (f) In Annex XII, under 'P1000 — 7; Vessel Position domain', the following line is inserted:

'P1000 — 8; Inspection and Surveillance domain'.

*Article 2***Entry into force**

This Regulation shall enter into force on the twentieth day following that of its publication in the *Official Journal of the European Union*.

This Regulation shall be binding in its entirety and directly applicable in all Member States.

Done at Brussels, 14 January 2020.

For the Commission

The President

Ursula VON DER LEYEN

ACTS ADOPTED BY BODIES CREATED BY INTERNATIONAL AGREEMENTS

Only the original UN/ECE texts have legal effect under international public law. The status and date of entry into force of this Regulation should be checked in the latest version of the UN/ECE status document TRANS/WP.29/343, available at: <http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29fdocsts.html>

UN Regulation No 53 — Uniform provisions concerning the approval of category L₃ vehicles with regard to the installation of lighting and light-signalling devices [2020/31]

Incorporating all valid text up to:

Supplement 2 to the 02 series of amendments — Date of entry into force: 15 October 2019

CONTENTS

REGULATION

1. Scope
2. Definitions
3. Application for approval
4. Approval
5. General specifications
6. Individual specifications
7. Modifications of the vehicle type or of the installation of its lighting and light-signalling devices
8. Conformity of production
9. Penalties for non-conformity of production
10. Production definitively discontinued
11. Transitional provisions
12. Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities

Annexes

1. Communication
2. Arrangement of approval marks
3. Lamp surfaces, axis and centre of reference, and angles of geometric visibility
4. Forward visibility of red lights and rearward visibility of white lights
5. Control of conformity of production
6. Explanation about 'the horizontal inclination', 'the bank angle' and the angle 'δ'
7. Observing area towards the apparent surface of exterior courtesy lamps

1. SCOPE

This Regulation applies to vehicles of category L₃ ⁽¹⁾ with regard to the installation of lighting and light-signalling devices.

2. DEFINITIONS

For the purpose of this Regulation, the definitions given in the latest series of amendments to UN Regulation No 48 in force at the time of application for type approval shall apply, unless otherwise specified in this Regulation.

2.1. 'Vehicle type' means a category of vehicles which do not differ from each other in such essential respects as:

2.1.1. The dimensions and external shape of the vehicle;

2.1.2. The number and position of the devices;

2.1.3. The following shall likewise not be deemed to be 'vehicles of a different type':

2.1.3.1. Vehicles which differ within the meaning of paragraphs 2.1.1 and 2.1.2 above but not in such a way as to entail a change in the kind, number, position and geometric visibility of the lamps prescribed for the vehicle type in question; and

2.1.3.2. Vehicles on which lamps approved under one of the Regulations annexed to the 1958 Agreement, or lamps allowed in the country in which the vehicles are registered, are fitted, or are absent where their fitting is optional;

2.2. 'Unladen vehicle' means a vehicle without a driver, or passenger, and unladen, but with its fuel tank full and its normal complement of tools;

2.3. 'Lamp' means a device designed to illuminate the road or to emit a light signal to other road users. Rear registration plate lamp and retro-reflectors are likewise to be regarded as lamps;

2.3.1. 'Equivalent lamps' means lamps having the same function and authorised in the country in which the vehicle is registered; such lamps may have different characteristics from those of the lamps with which the vehicle is equipped at the time of approval, on condition that they satisfy the requirements of this Regulation;

2.3.2. 'Independent lamp' means devices having separate apparent surfaces, separate light sources and separate lamp bodies;

2.3.3. 'Grouped lamps' means devices having separate apparent surfaces and separate light sources, but a common lamp body;

2.3.4. 'Combined lamps' means devices having separate apparent surfaces, but a common light source and a common lamp body;

2.3.5. 'Reciprocally incorporated' means devices having separate light sources or a single light source operating under different conditions (for example, optical, mechanical, electrical differences), totally or partially common apparent surfaces and a common lamp body;

⁽¹⁾ As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2. - <http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html>

- 2.3.6. 'Direction indicator lamp' means the lamp used to indicate to other road-users that the driver intends to change direction to the right or to the left;

A direction indicator lamp or lamps may also be used according to provisions of UN Regulation No 97.

- 2.3.7. 'Front position lamp' means the lamp used to indicate the presence of the vehicle when viewed from the front;

- 2.3.8. 'Rear position lamp' means the lamp used to indicate the presence of the vehicle when viewed from the rear;

- 2.3.9. 'Retro-reflector' means a device used to indicate the presence of a vehicle by the reflection of light emanating from a light source not connected to the vehicle, the observer being situated near the source;

For the purpose of this Regulation, retro-reflecting number plates are not considered as retro-reflectors;

- 2.4. 'Light-emitting surface' of a 'lighting device', 'light-signalling device' or a retro-reflector means all or part of the exterior surface of the transparent material as declared in the request for approval by the manufacturer of the device on the drawing, see Annex 3;

- 2.5. 'Illuminating surface' (see Annex 3);

- 2.5.1. 'Illuminating surface of a lighting device' (driving beam (main beam) headlamp, passing beam (dipped beam) headlamp, front fog lamp) means the orthogonal projection of the full aperture of the reflector, or in the case of headlamps with an ellipsoidal reflector of the 'projection lens', on a transverse plane. If the lighting device has no reflector, the definition of paragraph 2.5.2 below shall be applied. If the light emitting surface of the lamp extends over part only of the full aperture of the reflector, then the projection of that part only is taken into account.

In the case of a passing-beam headlamp, the illuminating surface is limited by the apparent trace of the cut-off on to the lens. If the reflector and lens are adjustable relative to one another, the mean adjustment should be used;

In the case where any combination of a headlamp producing the principal passing-beam and additional lighting units or light sources designed to produce bend lighting are operated together, the individual illuminating surfaces, taken together, constitute the illuminating surface.

- 2.5.2. 'Illuminating surface of a light-signalling device other than a retro-reflector' (direction indicator lamp, stop lamp, front position lamp, rear position lamp, hazard warning signal, rear fog lamp) means the orthogonal projection of the lamp in a plane perpendicular to its axis of reference and in contact with the exterior light-emitting surface of the lamp, this projection being bounded by the edges of screens situated in this plane, each allowing only 98 per cent of the total luminous intensity of the light to persist in the direction of the axis of reference. To determine the lower, upper and lateral limits of the illuminating surface, only screens with horizontal or vertical edges shall be used;

- 2.5.3. 'Illuminating surface of a retro-reflector' (para. 2.3.9 above) means the orthogonal projection of a retro-reflector in a plane perpendicular to its axis of reference and delimited by planes continuous to the outermost parts of the retro-reflector's optical system and parallel to that axis. For the purposes of determining the lower, upper and lateral edges of the device, only horizontal and vertical planes shall be considered;

- 2.6. The 'apparent surface' for a defined direction of observation means, at the request of the manufacturer or his duly accredited representative, the orthogonal projection of:

Either the boundary of the illuminating surface projected on the exterior surface of the lens (a-b),

Or the light-emitting surface (c-d),

In a plane perpendicular to the direction of observation and tangential to the most exterior point of the lens (see Annex 3 to this Regulation);

- 2.7. 'Centre of reference' means the intersection of the axis of reference with the exterior light-emitting surface; it is specified by the manufacturer of the lamp;
- 2.8. 'Extreme outer edge', on either side of the vehicle means the plane parallel to the median longitudinal plane of the vehicle and touching the lateral extremity of the vehicle, disregarding the projection or projections:
 - 2.8.1. Of rear-view mirrors,
 - 2.8.2. Of direction indicator lamps,
 - 2.8.3. Of front and rear position lamps and retro-reflectors;
- 2.9. 'Over-all width' means the distance between the two vertical planes defined in paragraph 2.8 above;
- 2.10. 'Colour of the light emitted from the device'. The definitions of the colour of the light emitted given in UN Regulation No 48 and its series of amendments in force at the time of application for type approval shall apply to this Regulation.
- 2.11. 'Gross vehicle mass' or 'maximum mass' means the technically permissible maximum laden mass as declared by the manufacturer.
- 2.12. 'Laden' means so loaded as to attain the gross vehicle mass as defined in paragraph 2.11 above.
- 2.13. 'Horizontal inclination' means the angle created between the beam pattern when the motorcycle is set as specified in paragraph 5.4 of this Regulation, and the beam pattern when the motorcycle is banked (see drawing in Annex 6);
- 2.14. 'Horizontal inclination adjustment system (HIAS)' means a device that adjusts the horizontal inclination of the headlamp towards zero;
- 2.15. 'Bank angle' means the angle made with the vertical by the vertical longitudinal median plane of the motorcycle, when the motorcycle is rotated about its longitudinal axis (see drawing in Annex 6);
- 2.16. 'HIAS signal' means any control signal or, any additional control input to the system or, a control output from the system to the motorcycle;
- 2.17. 'HIAS signal generator' means a device, reproducing one or more of the HIAS signals for system test;
- 2.18. 'HIAS test angle' means the angle δ created by the headlamp cut-off line and HH line (in case of an asymmetrical beam headlamp, the horizontal part of the cut-off shall be used), (see drawing in Annex 6).
- 2.19. 'Bend lighting' means a lighting function to provide enhanced illumination in bends.
- 2.20. 'H plane' means the horizontal plane containing the centre of reference of the lamp.
- 2.21. 'Sequential activation' means an electrical connection where the individual light sources of a lamp are wired such that they are activated in a predetermined sequence.

- 2.22. 'Emergency stop signal' means a signal to indicate to other road users to the rear of the vehicle that a high retardation force has been applied to the vehicle relative to the prevailing road conditions.
- 2.23. 'Exterior courtesy lamp' means a lamp used to provide supplementary illumination to assist the mounting and dismounting of the vehicle driver and passenger or in loading operations.
3. APPLICATION FOR APPROVAL
- 3.1. The application for approval of a vehicle type with regard to the installation of its lighting and light-signalling devices shall be submitted by the vehicle manufacturer or by his duly accredited representative.
- 3.2. It shall be accompanied by the undermentioned documents in triplicate and the following particulars:
- 3.2.1. A description of the vehicle type with regard to the items mentioned in paragraphs 2.1.1 to 2.1.3 above; the vehicle type duly identified shall be specified;
- 3.2.2. A list of the devices intended by the manufacturer to form the lighting and light-signalling equipment; the list may include several types of device for each function; each type shall be duly identified (national or international approval mark, if approved, name of manufacturer, etc.); in addition, the list may include in respect of each function the additional annotation 'or equivalent devices';
- 3.2.3. A layout drawing of the lighting and light-signalling installation as a whole, showing the position of the various devices on the vehicle; and
- 3.2.4. If necessary, in order to verify the conformity to the prescriptions of the present regulation, a layout drawing or drawings of each lamp showing the illuminating surface, as defined in paragraph 2.7.1 above, the light-emitting surface as defined in paragraph 2.4 above, the axis of reference as defined in UN Regulation No 48 and the centre of reference as defined in UN Regulation No 48. This information is not necessary in the case of the rear registration plate lamp (as defined in UN Regulation No 48).
- 3.2.5. The application shall include a statement of the method used for the definition of the apparent surface (paragraph 2.6 above).
- 3.3. An unladen vehicle fitted with a complete set of lighting and light-signalling equipment, as prescribed in paragraph 3.2.2 above, and representative of the vehicle type to be approved shall be submitted to the Technical Service responsible for conducting approval tests.
4. APPROVAL
- 4.1. If the vehicle submitted for approval pursuant to this Regulation meets the requirements of the Regulation in respect of all the devices specified in the list, approval of that vehicle type shall be granted.
- 4.2. An approval number shall be assigned to each type approved. Its first two digits (at present 01 for the Regulation in its 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval.
- The same Contracting Party may not assign the same number to another vehicle type or to the same vehicle type submitted with equipment not specified in the list referred to in paragraph 3.2.2 above, subject to the provisions of paragraph 7 of this Regulation.
- 4.3. Notice of approval or of extension or refusal or withdrawal of approval or production definitively discontinued of a vehicle type pursuant to this Regulation shall be communicated to the Parties to the Agreement which apply this Regulation, by means of a form conforming to the model in Annex 1 to this Regulation.

- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation an international approval mark consisting of:
- 4.4.1. A circle surrounding the letter 'E' followed by the distinguishing number of country which has granted approval; ⁽²⁾
- 4.4.2. The number of this Regulation followed by the letter 'R', a dash, and the approval number to the right of the circle prescribed in paragraph 4.4.1 above.
- 4.5. If the vehicle conforms to a vehicle type approved, under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1 above need not be repeated; in such a case the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1 above.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. The approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.
- 4.8. Annex 2 to this Regulation gives examples of the arrangement of the approval marks.
5. GENERAL SPECIFICATIONS
- 5.1. The lighting and light-signalling devices shall be so fitted that in normal conditions of use, and notwithstanding the vibrations to which they may be subjected, they retain the characteristics prescribed by this Regulation and enable the vehicle to comply with the requirements of this Regulation.
- In particular, it shall not be possible for the lamps to be inadvertently maladjusted.
- 5.2. The illuminating lamps shall be so installed that correct adjustment of their orientation can easily be carried out.
- 5.3. For all light-signalling devices the reference axis of the lamp when fitted to the vehicle shall be parallel to the bearing plane of the vehicle on the road; in addition, it shall be perpendicular to the median longitudinal plane of the vehicle in the case of side retro-reflectors and parallel to that plane in the case of all light-signalling devices. A tolerance of $\nabla 3^\circ$ shall be allowed in each direction. In addition, if specifications for fitting are provided by the manufacturer they shall be complied with.
- 5.4. In the absence of specific instructions, the height and orientation of the lamps shall be verified with the vehicle unladen and placed on a flat horizontal surface, its median longitudinal plane being vertical and the handlebars being in the position corresponding to the straight ahead movement. The tyre pressures shall be those prescribed by the manufacturer for the particular conditions of loading required in this Regulation.
- 5.5. In the absence of specific instructions:
- 5.5.1. Single lamps or reflectors shall be mounted such that their centre of reference lies in the median longitudinal plane of the vehicle;
- 5.5.2. Lamps constituting a pair and having the same function shall:
- 5.5.2.1. Be mounted symmetrically in relation to the median longitudinal plane;

⁽²⁾ The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.6, Annex 3

- 5.5.2.2. Be symmetrical to one another in relation to the median longitudinal plane;
- 5.5.2.3. Satisfy the same colorimetric requirements; and
- 5.5.2.4. Have identical nominal photometric characteristics;
- 5.5.2.5. Come on and go off simultaneously;
- 5.6. Grouped, combined or reciprocally incorporated or single lamps
 - 5.6.1. Lamps may be grouped, combined or reciprocally incorporated with one another provided that all requirements regarding colour, position, orientation, geometric visibility, electrical connections and other requirements, if any, are fulfilled.
 - 5.6.1.1. The photometric and colorimetric requirements of a lamp shall be fulfilled when all other functions with which this lamp is grouped, combined or reciprocally incorporated are switched OFF.

However, when a front or rear position lamp is reciprocally incorporated with one or more other function(s) which can be activated together with them, the requirements regarding colour of each of these other functions shall be fulfilled when the reciprocally incorporated function(s) and the front or rear position lamps are switched ON.
 - 5.6.1.2. Stop lamps and direction indicator lamps are not permitted to be reciprocally incorporated.
 - 5.6.1.3. However, where stop lamps and direction indicator lamps are grouped, any horizontal or vertical straight line passing through the projections of the apparent surfaces of these functions on a plane perpendicular to the reference axis, shall not intersect more than two borderlines separating adjacent areas of different colour.
 - 5.6.2. Single lamps
 - 5.6.2.1. Single lamps as defined in paragraph 2.16.1 of UN Regulation No 48, subparagraph (a), composed of two or more distinct parts, shall be installed in such a way that:
 - (a) Either the total area of the projection of the distinct parts on a plane tangent to the exterior surface of the outer lens and perpendicular to the reference axis shall occupy not less than 60 per cent of the smallest quadrilateral circumscribing the said projection; or
 - (b) The minimum distance between the facing edges of two adjacent/tangential distinct parts shall not exceed 75 mm when measured perpendicularly to the reference axis.These requirements shall not apply to a single retro-reflector.
 - 5.6.2.2. Single lamps as defined in paragraph 2.16.1 of UN Regulation No 48, subparagraph (b) or (c), composed of two lamps marked 'D' or two independent retro reflectors, shall be installed in such a way that:
 - (a) Either the projection of the apparent surfaces in the direction of the reference axis of the two lamps or retro reflectors occupies not less than 60 per cent of the smallest quadrilateral circumscribing the projections of the said apparent surfaces in the direction of the reference axis; or
 - (b) The minimum distance between the facing edges of the apparent surfaces in the direction of the reference axis of two lamps or two independent retro reflectors does not exceed 75 mm when measured perpendicularly to the reference axis.
 - 5.6.2.3. Single lamps as defined in paragraph 2.16.1 of UN Regulation No 48, subparagraph (d), shall fulfil the requirements of paragraph 5.6.2.1.

Where two or more lamps and/or two or more separate apparent surfaces are included into the same lamp body and/or have a common outer lens, these shall not be considered as an interdependent lamp system.

However, a lamp in the shape of a band or strip may be part of an interdependent lamp system.

- 5.7. The maximum height above ground shall be measured from the highest point and the minimum height from the lowest point of the apparent surface in the direction of the reference axis. For passing-beam headlamps, the minimum height from the ground shall be measured from the lowest point of the effective outlet of the optical system (e.g. reflector, lens, projection lens) independent of its utilisation.

Where the (maximum and minimum) height above the ground clearly meets the requirements of the Regulation, the exact edges of any surface need not be determined.

When referring to the distance between lamps, the position, as regards width, shall be determined from the inner edges of the apparent surface in the direction of the reference axis.

Where the position, as regards width, clearly meets the requirements of the Regulation, the exact edges of any surface need not be determined.

For the purposes of reducing the geometric visibility angles, the position of a lamp with regard to height above the ground, shall be measured from the H plane.

- 5.8. In the absence of specific instructions, no lamps other than direction indicator lamps, the vehicle-hazard warning signal lamps and the emergency stop signal shall be flashing lamps.

- 5.8.1. The photometric characteristics of a direction indicator lamp except for categories 5 and 6 specified in UN Regulation No 6 or UN Regulation No 148, and of a direction indicator lamp specified in UN Regulation No 50 or UN Regulation No 148 may be varied during a flash by sequential activation of light sources as specified in paragraph 5.6 of UN Regulation No 6 or paragraph 5.6.11 of UN Regulation No 148 or in paragraph 6.8 of UN Regulation No 50.

This provision shall not apply when direction indicator lamps of categories 2a and 2b of UN Regulation No 6 or UN Regulation No 148 or category 12 of UN Regulation No 50 or UN Regulation No 148 are operated as emergency stop signal according to paragraph 6.14 of this Regulation.

- 5.9. No red light which could give rise to confusion shall be emitted from a lamp as defined in paragraph 2.5 in a forward direction and no white light which could give rise to confusion, shall be emitted from a lamp as defined in paragraph 2.5 in a rearward direction. No account shall be taken of lighting devices fitted for the interior lighting of the vehicle. In case of doubt, this requirement shall be verified as follows (see drawing in Annex 4):

- 5.9.1. Visibility of red light towards the front: a red lamp shall not be directly visible to an observer moving in zone 1 of a transverse plane situated 25 m forward of the foremost point on the vehicle;

- 5.9.2. Visibility of white light towards the rear: a white lamp shall not be directly visible to an observer moving in zone 2 of a transverse plane situated 25 m rearward of the rearmost point on the vehicle;

- 5.9.3. In their respective planes, the zones 1 and 2 explored by the eye of the observer are bound:

- 5.9.3.1. In height, by two horizontal planes 1 m and 2,2 m respectively above the ground;

- 5.9.3.2. In width, by two vertical planes which, forming to the front and the rear respectively an angle of 15° outwards from the vehicle's median longitudinal plane, pass through the point or points of contact of vertical planes parallel to the vehicle's median longitudinal plane and delimiting the vehicle's over-all width; if there are several points of contact, the foremost shall correspond to the forward plane and the rearmost to the rearward plane.

- 5.10. The electrical connections shall be such that the front position lamp or the passing-beam headlamp, if there is no front position lamp, the rear position lamp and the rear-registration-plate illuminating device cannot be switched ON or OFF otherwise than simultaneously, unless otherwise specified.

- 5.10.1. In the case of an interdependent lamp system, all light sources shall be switched on and off simultaneously.

5.11. In the absence of specific instructions, the electrical connection shall be such that the driving-beam headlamp, the passing-beam headlamp and the fog lamp cannot be switched on unless the lamps referred to in paragraph 5.10 above are likewise switched on. This requirement need not, however, be satisfied in the case of the driving-beam headlamp and passing-beam headlamp where their luminous warnings consist in switching on the passing-beam headlamp intermittently, at short intervals, or in switching on the driving-beam headlamp intermittently, or in switching on the passing-beam headlamp and driving-beam headlamp alternately at short intervals.

5.11.1. If installed, the daytime running lamp shall automatically be ON when the engine is running. If the headlamp is switched on, the daytime running lamp shall not come on when the engine is running.

If no daytime running lamp is installed, the headlamp shall automatically be on when the engine is running.

5.12. Tell-tale lamps

5.12.1. Every tell-tale lamp shall be readily visible to a driver in the normal driving position.

5.12.2. Where a 'circuit-closed' tell-tale is prescribed by this Regulation, it may be replaced by an 'operating' tell-tale.

5.13. Colours of the lights

The colours of the lights referred to in this Regulation shall be as follows:

Driving-beam headlamp:	white
Passing-beam headlamp:	white
Direction-indicator lamp:	amber
Stop lamp:	red
Rear-registration plate lamp:	white
Front position lamp:	white or amber
Rear position lamp:	red
Rear retro-reflector, non-triangular:	red
Side retro-reflector, non-triangular:	amber at the front amber or red at the rear
Vehicle-hazard warning signal:	amber
Front fog lamp:	white or selective yellow
Rear fog lamp:	red
Daytime running lamp:	white
Emergency stop signal:	amber or red
Exterior courtesy lamp:	white

5.14. Every vehicle submitted for approval pursuant to this Regulation shall be equipped with the following lighting and light-signalling devices:

5.14.1. Driving-beam headlamp (paragraph 6.1);

5.14.2. Passing-beam headlamp (paragraph 6.2);

5.14.3. Direction indicator lamps (paragraph 6.3);

- 5.14.4. Stop lamp, S1 category device specified in UN Regulation No 7 or UN Regulation No 148 or stop lamp specified in UN Regulation No 50 (paragraph 6.4) or stop lamp for category L vehicles in UN Regulation No 148;
- 5.14.5. Rear-registration-plate illuminating device (paragraph 6.5);
- 5.14.6. Front position lamp (paragraph 6.6);
- 5.14.7. Rear position lamp (paragraph 6.7);
- 5.14.8. Rear retro reflector, non-triangular (paragraph 6.8);
- 5.14.9. Side retro reflector, non-triangular (paragraph 6.12);
- 5.15. It may, in addition, be equipped with the following lighting and light-signalling devices;
 - 5.15.1. Vehicle-hazard warning signal (paragraph 6.9);
 - 5.15.2. Fog lamps;
 - 5.15.2.1. Front fog lamp (paragraph 6.10);
 - 5.15.2.2. Rear fog lamp (paragraph 6.11);
 - 5.15.3. Daytime running lamp (paragraph 6.13);
 - 5.15.4. Stop lamp, S3 category device specified in UN Regulation No 7 (paragraph 6.4) or UN Regulation No 148.
 - 5.15.5. Emergency stop signal (paragraph 6.14).
 - 5.15.6. Exterior courtesy lamp (paragraph 6.15).
- 5.16. The fitting of each of the lighting and light-signalling devices mentioned in paragraphs 5.14 and 5.15 above shall be effected in conformity with the relevant requirements in paragraph 6 of this Regulation.
- 5.17. The fitting of any lighting and light-signalling devices other than those mentioned in paragraphs 5.14 and 5.15 above is prohibited for the purposes of type approval.
- 5.18. Lighting and light-signalling devices type-approved for four-wheeled vehicles of categories M₁ and N₁ and referred to in paragraphs 5.14 and 5.15 above may also be fitted to motorcycles.
- 5.19. Rear position lamps, rear direction-indicators and rear retro-reflectors, may be installed on movable components only:
 - 5.19.1. If at all fixed positions of the movable components the lamps on the movable components meet all the position, geometric visibility, colorimetric and photometric requirements for those lamps.
 - 5.19.2. In the case where the functions referred to in paragraph 5.19 are obtained by an assembly of two lamps marked 'D' (see paragraph 2.16.1 of UN Regulation No 48), only one of the lamps needs to meet the position, geometric visibility, colorimetric and photometric requirements for those lamps at all fixed positions of the movable components.

- 5.19.3. Where additional lamps for the above functions are fitted and are activated, when the movable component is in any fixed open position, provided that these additional lamps satisfy all the position, geometric visibility, colorimetric and photometric requirements applicable to the lamps installed on the movable component.
- 5.19.4. In the case where the functions referred to in paragraph 5.19 are obtained by an interdependent lamp system either of the following conditions shall apply:
- (a) Should the complete interdependent lamp system be mounted on the moving component(s), the requirements of paragraph 5.19.1 shall be satisfied. However, additional lamps for the above functions may be activated, when the movable component is in any fixed open position, provided that these additional lamps satisfy all the position, geometric visibility, colorimetric and photometric requirements applicable to the lamps installed on the movable component.
- or
- (b) Should the interdependent lamp system be partly mounted on the fixed component and partly mounted on a movable component, the interdependent lamp(s) specified by the Applicant during the device approval procedure shall meet all the position, outwards geometric visibility, colorimetric and photometric requirements for those lamps, at all fixed positions of the movable component(s). The inwards geometric visibility requirement(s) is(are) deemed to be satisfied if this(these) interdependent lamp(s) still conform(s) to the photometric values prescribed in the field of light distribution for the approval of the device, at all fixed positions of the movable component(s).
- 5.20. General provisions relating to geometric visibility
- 5.20.1. There shall be no obstacle on the inside of the angles of geometric visibility to the propagation of light from any part of the apparent surface of the lamp observed from infinity. However, no account is taken of obstacles, if they were already present when the lamp was type-approved.
- 5.20.2. If measurements are taken closer to the lamp, the direction of observation shall be shifted parallel to achieve the same accuracy.
- 5.20.3. If, when the lamp is installed, any part of the apparent surface of the lamp is hidden by any further parts of the vehicle, proof shall be furnished that the part of the lamp not hidden by obstacles still conforms to the photometric values prescribed for the approval of the device.
- 5.20.4. When the vertical angle of geometric visibility below the horizontal may be reduced to 5 degrees (lamp at less than 750 mm above the ground, measured according to the provisions of paragraph 5.7) the photometric field of measurements of the installed optical unit may be reduced to 5 degrees below the horizontal.
- 5.20.5. In the case of an interdependent lamp system the geometric visibility requirements shall be fulfilled when all its interdependent lamps are operated together.
- 5.21. A device type approved according to any preceding series of amendments to UN Regulations Nos 148 and/or 149 and/or 150 is deemed equivalent to one approved according to the latest series of amendments to the pertinent UN Regulations Nos 148 and/or 149 and/or 150, when the change indexes (defined in UN Regulation No 48) related to each individual lamp (function) do not differ. In this case such a device may be fitted on the vehicle to be type approved without any update of the device type approval documents and device markings.

6. INDIVIDUAL SPECIFICATIONS

6.1. Driving-beam headlamp

6.1.1. Number:

6.1.1.1. For motorcycles having a cylinder capacity $\leq 125 \text{ cm}^3$

One or two of approved type according to:

- (a) Class C, D or E of UN Regulation No 113;
- (b) UN Regulation No 112;
- (c) UN Regulation No 1;
- (d) UN Regulation No 8;
- (e) UN Regulation No 20;
- (f) UN Regulation No 57;
- (g) UN Regulation No 72;
- (h) UN Regulation No 98;
- (i) Class A, B, D, CS, DS or ES of UN Regulation No 149.

6.1.1.2. For motorcycles having a cylinder capacity $> 125 \text{ cm}^3$

One or two of approved type according to:

- (a) Class D or E of UN Regulation No 113;
- (b) UN Regulation No 112;
- (c) UN Regulation No 1;
- (d) UN Regulation No 8;
- (e) UN Regulation No 20;
- (f) UN Regulation No 72;
- (g) UN Regulation No 98;
- (h) Class A, B, D, DS or ES of UN Regulation No 14.

Two of approved type according to:

- (i) Class C of UN Regulation No 113.

6.1.2. Arrangement

No special requirement.

6.1.3. Position

6.1.3.1. Width

6.1.3.1.1. An independent driving lamp may be fitted above or below or to one side of another front lamp: if these lamps are on top of the other the reference centre of the driving lamp shall be located within the median longitudinal plane of the vehicle; if these lamps are side by side their reference centre shall be symmetrical in relation to the median longitudinal plane of the vehicle.

6.1.3.1.2. A driving-beam headlamp, that is reciprocally incorporated with another front lamp, shall be fitted in such a way that its reference centre lies within the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with an independent principal passing-beam headlamp, or a principal passing-beam headlamp that is reciprocally incorporated with a front position lamp alongside the driving-beam headlamp, their reference centres shall be symmetrical in relation to the median longitudinal plane of the vehicle.

6.1.3.1.3. Two driving lamps of which either one or both are reciprocally incorporated with another front lamp shall be fitted in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.

- 6.1.3.2. The length: at the front of the vehicle. This requirement is regarded as satisfied if the light emitted does not cause discomfort to the driver either directly or indirectly by means of the rear-view mirrors and/or reflective surfaces on the vehicle.
- 6.1.3.3. In any case, the distance between the edge of the illuminating surface of any independent driving lamp and the edge of that of the lamp producing the principal passing-beam shall not exceed 200 mm. The distance between the edge of the illuminating surface of any independent driving lamp and the ground shall be from 500 mm to 1 300 mm.
- 6.1.3.4. In the case of two driving lamps: the distance separating the illuminating surfaces of two driving lamps shall not exceed 200 mm.
- 6.1.4. Geometric visibility
- The visibility of the illuminating surface, including its visibility in areas which do not appear to be illuminated in the direction of observation considered, shall be ensured within a divergent space defined by generating lines based on the perimeter of the illuminating surface and forming an angle of not less than 5° with the axis of reference of the headlamp.
- 6.1.5. Orientation
- 6.1.5.1. Forwards. The lamp(s) may move with the steering angle.
- 6.1.5.2. An HIAS may be installed for the driving-beam.
- 6.1.6. Electrical connections
- The passing-beam(s) may remain illuminated with the driving-beam(s).
- 6.1.7. Tell-tales
- 6.1.7.1. 'Circuit-closed' tell-tale.
- Mandatory, non-flashing blue signal lamp.
- 6.1.7.2. 'HIAS failure' tell-tale
- Mandatory, flashing amber signal lamp, which may be combined with the tell-tale referred to in paragraph 6.2.8.2 below. It shall be activated whenever a failure is detected with respect to the HIAS signals. It shall remain activated while the failure is present.
- 6.1.8. Other requirements
- 6.1.8.1. The aggregate maximum intensity of the driving-beam headlamps which can be switched on simultaneously shall not exceed 430 000 cd which corresponds to a reference number of 100. (The approval value).
- 6.1.8.2. In the event of a driving-beam HIAS failure, without the use of any special tools, it shall be possible to:
- (a) Deactivate the HIAS until it is reset according to the manufacturer's instructions; and
- (b) Re-position the driving-beam so that its horizontal and vertical alignments are the same as a headlamp not equipped with HIAS.
- The manufacturer shall provide a detailed description of the procedure for resetting the HIAS.
- Alternatively, the manufacturer may choose to install an automatic system that either achieves both the tasks specified above or resets the HIAS. In this case, the manufacturer shall provide the Technical Service with a description of the automatic system and, until such time as harmonized requirements have been developed, demonstrate the means of verifying that the automatic system works as described.

6.2. Passing-beam headlamp

6.2.1. Number:

6.2.1.1. For motorcycles having a cylinder capacity $\leq 125 \text{ cm}^3$

One or two of approved type according to:

- (a) Class C, D or E of UN Regulation No 113;
- (b) UN Regulation No 112;
- (c) UN Regulation No 1;
- (d) UN Regulation No 8;
- (e) UN Regulation No 20;
- (f) UN Regulation No 57;
- (g) UN Regulation No 72;
- (h) UN Regulation No 98;
- (i) Class A, B, D, CS, DS or ES of UN Regulation No 149.

6.2.1.2. For motorcycles having a cylinder capacity $> 125 \text{ cm}^3$

One or two of approved type according to:

- (a) Class D or E of UN Regulation No 113;
- (b) UN Regulation No 112;
- (c) UN Regulation No 1;
- (d) UN Regulation No 8;
- (e) UN Regulation No 20;
- (f) UN Regulation No 72;
- (g) UN Regulation No 98;
- (h) Class A, B, D, DS or ES of UN Regulation No 149.

Two of approved type according to:

- (i) Class C of UN Regulation No 113;
- (j) Class CS of UN Regulation No 149.

6.2.2. Arrangement

No special requirement.

6.2.3. Position

6.2.3.1. Width

6.2.3.1.1. An independent passing lamp may be installed above, below or to one side of another front lamp: if these lamps are one above the other the reference centre of the lamp producing the principal passing-beam shall be located within the median longitudinal plane of the vehicle; if these lamps are side by side their reference centre shall be symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.1.2. A headlamp producing the principal passing-beam, that is reciprocally incorporated with another front lamp, shall be fitted in such a way that its reference centre lies within the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with an independent driving-beam headlamp, or a driving-beam headlamp that is reciprocally incorporated with a front position lamp alongside the headlamp producing the principal passing-beam, their reference centres shall be symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.1.3. Two headlamps producing the principal passing-beam, of which either one or both are reciprocally incorporated with another front lamp shall be installed in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.1.4. If installed, additional lighting unit(s) which provide bend lighting, type approved as part of the passing-beam according to UN Regulation No 113 or UN Regulation No 149, shall be installed under the following conditions:

In the case of (a) pair(s) of additional lighting units, they shall be installed so that their reference centre(s) are symmetrical in relation to the median longitudinal plane of the vehicle.

In the case of a single additional lighting unit, its reference centre shall be coincident with the median longitudinal plane of the vehicle.

6.2.3.2. Height: a minimum of 500 mm and a maximum of 1 200 mm above the ground.

6.2.3.3. Length: at the front of the vehicle. This requirement is regarded as satisfied if the light emitted does not cause discomfort to the driver either directly or indirectly by means of the rear-view mirrors and/or reflective surfaces of the vehicle.

6.2.3.4. In the case of two headlamps producing the principal passing-beam the distance separating the illuminating surfaces shall not exceed 200 mm.

6.2.4. Geometric visibility

Defined by angles α and β as specified in paragraph 2.13 of UN Regulation No 48:

α = 15° upwards and 10° downwards;

β = 45° to the left and to the right for a single lamp;

45° outwards and 10° inwards for each pair of lamps.

The presence of partitions or other items of equipment near the headlamp shall not give rise to secondary effects causing discomfort to other road users.

6.2.5. Orientation

6.2.5.1. Forwards. The lamp(s) may move in line with the steering angle.

6.2.5.2. The vertical inclination of the headlamp producing the principal passing-beam shall remain between -0,5 and -2,5 per cent, except in the case where an external adjusting device is present.

6.2.5.3. For headlamp producing the principal passing-beam with a light source having an objective luminous flux which exceeds 2 000 lumens, the vertical inclination of the headlamp shall remain between -0,5 and -2,5 per cent. A headlamp levelling device may be used to satisfy the requirements of this paragraph but its operation shall be automatic. ⁽²⁾

6.2.5.4. The requirement in paragraph 6.2.5.3 above shall be tested on the vehicle in the following conditions:

Condition A (rider alone):

A mass of 75 kg $\pm$ 1 kg, simulating the rider, shall be placed on the vehicle in such a way as to reproduce the axle loads declared by the manufacturer for this loading condition.

The vertical inclination (initial aiming) of the headlamp producing the principal passing-beam shall be set, following the manufacturer's instructions, between -1,0 and -1,5 per cent.

⁽²⁾ However, until 60 months after the date of entry into force of Supplement 10 to the 01 series of amendments this operation may be manual without the use of tools. In such case the manufacturer shall provide in the vehicle owners' manual instruction regarding such manual headlamp levelling.

Condition B (fully laden motorcycle):

Masses, simulating the manufacturer's maximum total mass, shall be placed on the vehicle in such a way as to reproduce the axle loads declared by the manufacturer for this loading condition.

Before making the measurements, the vehicle shall be rocked three times up and down and then moved backwards and forwards for at least a complete wheel revolution.

6.2.5.5. An HIAS may be installed for the passing-beam. The HIAS shall not adjust the horizontal inclination by more than the vehicle's bank angle.

6.2.5.6. The requirement in paragraph 6.2.5.5 above shall be tested under the following conditions:

The test vehicle shall be set as specified in paragraph 5.4 of this Regulation. Incline the vehicle and measure the HIAS test angle.

The vehicle shall be tested in the following two conditions:

- (a) The maximum horizontal inclination adjustment angle specified by the manufacturer (to left and to right);
- (b) Half of the maximum horizontal inclination adjustment angle specified by the manufacturer (to left and to right).

And when the test vehicle is returned to the position as specified in paragraph 5.4 of this Regulation, the HIAS test angle shall return to zero quickly.

The handlebar may be fixed in the straight ahead position so as not to move during the vehicle inclination.

For the test the HIAS shall be activated by means of an HIAS signal generator.

The system shall be considered to satisfy the requirements of paragraph 6.2.5.5 above, if all measured HIAS test angles are not less than zero. This may be demonstrated by the manufacturer using other means accepted by the Type Approval Authority.

6.2.5.7. Additional light source(s) or additional lighting unit(s) may be activated only in conjunction with the principal passing-beam or the driving-beam to produce bend lighting. The illumination provided by the bend lighting shall not extend above the horizontal plane that is parallel with the ground and containing the reference axis of the headlamp producing the principal passing-beam for all bank angles as specified by the manufacturer during type approval of the device according to UN Regulation No 113 or UN Regulation No 149.

6.2.5.8. The requirement in paragraph 6.2.5.7 above shall be tested as follows:

The test vehicle shall be set as specified in paragraph 5.4 of this Regulation. Measure the bank angles on both sides of the vehicle under every condition where the bend lighting is activated. The bank angles to measure are the bank angles specified by the manufacturer during type approval of the device according to UN Regulation No 113 or UN Regulation No 149.

The handlebar may be fixed in the straight ahead position so as not to move during the vehicle inclination.

For the test, the bend lighting may be activated by means of a signal generator provided by the manufacturer.

The system is considered to satisfy the requirements of paragraph 6.2.5.7 above, if all measured bank angles on both sides of the vehicle are greater than or equal to the minimum bank angles given in the communication form for the type approval of the device according to UN Regulation No 113 or UN Regulation No 149.

Conformity to paragraph 6.2.5.7 above may be demonstrated by the manufacturer using other means accepted by the Type Approval Authority responsible for type approval.

6.2.6. Electrical connections

The control for changing over to the passing-beam(s) shall switch off the driving-beam(s) simultaneously. Passing-beam headlamps with a light source approved in accordance with UN Regulation No 99 shall remain switched on when the driving-beam is illuminated.

6.2.6.1. The additional light source(s) or additional lighting unit(s) used to produce bend lighting shall be so connected that it (they) cannot be activated unless the headlamp(s) producing the principal passing-beam or the driving-beam is (are) also activated.

The additional light source(s) or additional lighting unit(s) used to produce bend lighting on each side of the vehicle may only be automatically activated when the bank angle(s) is(are) greater or equal to the minimum bank angle(s) given in the communication form for the type approval of the device according to UN Regulation No 113 or UN Regulation No 149.

However, the additional light source(s) or additional lighting unit(s) shall not be activated when the bank angle is less than three degrees.

The additional light source(s) or additional lighting unit(s) shall be deactivated when the bank angle(s) is (are) less than the minimum bank angle(s) given in the communication form for the type approval of the device according to UN Regulation No 113 or UN Regulation No 149.

6.2.7. Tell-tales

6.2.7.1. 'Circuit-closed' tell-tale.

Optional; non-flashing green signal lamp.

6.2.7.2. 'HIAS failure' tell-tale.

Mandatory, flashing amber signal lamp, which may be combined with the tell-tale referred to in paragraph 6.1.7.2. It shall be activated whenever a failure is detected with respect to the HIAS signals. It shall remain activated while the failure is present.

6.2.7.3. In the event of a control system failure, additional light source(s) or additional lighting unit(s) producing bend lighting shall be switched OFF automatically.

6.2.8. Other requirements

In the event of a passing-beam HIAS failure, without the use of any special tools, it shall be possible to:

- (a) Deactivate the HIAS until it is reset according to the manufacturers instructions; and
- (b) Re-position the passing-beam so that its horizontal and vertical alignments are the same as a headlamp not equipped with HIAS.

The manufacturer shall provide a detailed description of the procedure for resetting the HIAS.

Alternatively, the manufacturer may choose to install an automatic system that either achieves both the tasks specified above or resets the HIAS. In this case, the manufacturer shall provide the Technical Service with a description of the automatic system and, until such time as harmonized requirements have been developed, demonstrate the means of verifying that the automatic system works as described.

6.3. Direction indicator lamp

6.3.1. Number

Two per side.

6.3.2. Arrangement

Two front indicators (category 1 as specified in UN Regulation No 6 or UN Regulation No 148 or category 11 specified in UN Regulation No 50 or UN Regulation No 148).

Two rear indicators (category 2 as specified in UN Regulation No 6 or UN Regulation No 148 or category 12 specified in UN Regulation No 50 or UN Regulation No 148).

6.3.3. Position

6.3.3.1. In width: For front indicators, the following requirements shall all be met:

- (a) There shall be a minimum distance of 240 mm between illuminating surfaces;
- (b) The indicators shall be situated outside the longitudinal vertical plane tangential to the outer edges of the illuminating surface of the driving-beam(s) and/or principal passing-beam(s);
- (c) There shall be a minimum distance between the illuminating surface of the indicators and that of the headlamp producing the principal passing-beam closest to one another as follows:

Minimum indicator intensity (cd)	Minimum separation (mm)
90	75
175	40
250	20
400	≤ 20

For rear indicators, the clearance between the inner edges of the two illuminating surfaces shall be at least 180 mm on the condition that the prescriptions of paragraph 2.13 of UN Regulation No 48 are applied even when the registration plate is mounted;

6.3.3.2. In height: not less than 350 mm nor more than 1 200 mm above the ground;

6.3.3.3. In length: the forward distance between the centre reference of the rear indicators and the transverse plane which constitutes the rearmost limit of the vehicle's over-all length shall not exceed 300 mm.

6.3.4. Geometric visibility

Horizontal angles: 20° inwards, 80° outwards.

Vertical angles: 15° above and below the horizontal.

However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

6.3.5. Orientation

The front direction indicators may move in line with the steering angle.

6.3.6. Electrical connections

6.3.6.1. The direction indicator lamps shall switch on independently of the other lamps. All direction indicator lamps on one side of a vehicle shall be switched on and off by means of one control.

6.3.6.2. The direction indicator lamps may be switched ON to indicate the status of the device for protection of vehicles against unauthorized use.

6.3.6.3. The indication described in paragraph 6.3.6.2 shall be produced by the simultaneous operation of the direction indicator lamps and shall be in accordance to the following conditions.

In case of single indication: 3 seconds maximum

In case of continuous indication:

Duration:	5 minutes maximum
Frequency:	(2 ± 1) Hz
On time:	Off time ± 10 per cent

This indication shall be allowed only when the device which starts and/or stops the engine (propulsion system) is set in a position which makes it impossible for the engine (propulsion system) to operate.

6.3.7. 'Operating' tell-tale

Mandatory. This may be optical or auditory or both. If it is optical it shall be (a) flashing green lamp(s), which, in the event of defective operation of any of the direction indicators, is extinguished, remains alight without flashing, or shows a marked change of frequency.

6.3.8. Other requirements

The characteristics indicated below shall be measured with no other load on the electrical system than that required for the operation of the engine and the lighting devices. For all vehicles:

6.3.8.1. The light flashing frequency shall be 90 ± 30 times per minute;

6.3.8.2. The flashing of the direction indicators on the same side of the vehicle may occur synchronously or alternately;

6.3.8.3. Operation of the light-signal control shall be followed within not more than one second by the appearance of the light and within not more than one-and-one half seconds by the first extinction of the light.

6.3.8.4. In the event of failure, other than a short circuit, of one direction indicator lamp, the other(s) direction indicator lamp(s) indicating the same direction shall continue to flash or remain alight, but the frequency in this condition may be different from that prescribed.

6.4. Stop lamp

6.4.1. Number

One or two approved as a category S1 device according to UN Regulation No 7 or UN Regulation No 148 or stop lamp according to UN Regulation No 50 or stop lamp for category L vehicles of UN Regulation No 148.

Optional one approved as a category S3 device according to UN Regulation No 7 or UN Regulation No 148.

6.4.2. Arrangement

No special requirement.

6.4.3. Position

6.4.3.1. For category S1 device specified in UN Regulation No 7 or UN Regulation No 148 or stop lamp specified in UN Regulation No 50 or UN Regulation No 148

In height: not less than 250 mm nor more than 1 500 mm above the ground;

In length: at the rear of the vehicle.

6.4.3.2. For the category S3 device specified in UN Regulation No 7 or UN Regulation No 148

In height: The horizontal plane tangential to the lower edge of the apparent surface shall not be less than 850 mm above the ground.

However, the horizontal plane tangential to the lower edge of the apparent surface shall be above the horizontal plane tangential to the upper edge of the apparent surface of the category S1 device specified in UN Regulation No 7 or UN Regulation No 148 or stop lamp specified in UN Regulation No 50 or stop lamp for category L vehicles of UN Regulation No 148.

In length: at the rear of the vehicle.

6.4.4. Geometric visibility

For category S1 device specified in UN Regulation No 7 or UN Regulation No 148 or stop lamp specified in UN Regulation No 50 or stop lamp for category L vehicles of UN Regulation No 148

Horizontal angle: 45° to left and to right for a single lamp;
45° outwards and 10° inwards for each pair of lamps;

Vertical angle: 15° above and below the horizontal.

However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

For category S3 device specified in UN Regulation No 7 or UN Regulation No 148

Horizontal angle: 10° to the left and to the right of the longitudinal axis of the vehicle.

Vertical angle: 10° above and 5° below the horizontal.

6.4.5. Orientation

Towards the rear of the vehicle.

6.4.6. Electrical connections

All stop lamps shall light up simultaneously at any service brake application.

6.4.7. 'Tell-tale'

Tell-tale optional; where fitted, this tell-tale shall be a tell-tale consisting of a non-flashing warning light which comes on in the event of the malfunctioning of the stop lamps.

6.4.8. Other requirements

None.

6.5. Rear-registration-plate illuminating device

6.5.1. Number

One, approved as a category 2 device according to UN Regulation No 50 or UN Regulation No 148. The device may consist of several optical components designed to illuminate the space reserved for the registration plate.

- | | | | |
|----------|----------------------|---|---|
| 6.5.2. | Arrangement | | |
| 6.5.3. | Position | } | Such that the device illuminates the space reserved for the registration plate. |
| 6.5.3.1. | In width: | | |
| 6.5.3.2. | In height: | | |
| 6.5.3.3. | In length: | | |
| 6.5.4. | Geometric visibility | | |
| 6.5.5. | Orientation | | |
- 6.5.6. Tell-tale
- Optional: Its function shall be performed by the tell-tale prescribed for the position lamp.
- 6.5.7. Other requirements
- When the rear registration plate lamp is combined with the rear position lamp, reciprocally incorporated in the stop lamp or in the rear fog lamp, the photometric characteristics of the rear registration plate lamp may be modified during the illumination of the stop lamp or the rear fog lamp.
- 6.6. Front position lamp
- 6.6.1. Number
- One or two if coloured white
- or
- Two (one per side) if coloured amber
- 6.6.2. Arrangement
- No special requirement.
- 6.6.3. Position
- 6.6.3.1. Width:
- An independent front position lamp may be fitted above or below, or to one side of another front lamp: if these lamps are one above the other, the reference centre of the front position lamp shall be located within the median longitudinal plane of the vehicle; if these lamps are side by side, their reference centres shall be symmetrical in relation to the median longitudinal plane of the vehicle;
- A front position lamp, that is reciprocally incorporated with another front lamp, shall be installed in such a way that its reference centre is situated in the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with another front lamp alongside the front position lamp, their reference centres shall be symmetrical in relation to the median longitudinal plane of the vehicle.
- Two front position lamps, one or both of them reciprocally incorporated with another front lamp, shall be installed in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.
- 6.6.3.2. In height: not less than 350 mm nor more than 1 200 mm above the ground.
- 6.6.3.3. In length: at the front of the vehicle.

6.6.4. Geometric visibility

Horizontal angle: 80° to the left and to the right for a single lamp:
the horizontal angle may be 80° outwards and 20° inwards for each pair of lamps.

Vertical angle: 15° above and below the horizontal.

However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

6.6.5. Orientation

Forwards. The lamp(s) may move in line with the steering angle.

6.6.6. 'Circuit-closed' tell-tale

Mandatory. Non-flashing green signal lamp. This tell-tale shall not be required if the instrument illumination lighting can be switched on or off only simultaneously with the position lamp(s).

6.6.7. Other requirements

When the front position lamp is reciprocally incorporated in the front direction indicator lamp, the electrical connection shall be such that the position lamp on the same side as the direction indicator lamp is switched off when the direction indicator lamp is flashing.

6.7. Rear position lamp

6.7.1. Number

One or two.

6.7.2. Arrangement

No special requirements.

6.7.3. Position

6.7.3.1. in height: not less than 250 mm nor more than 1 500 mm above the ground;

6.7.3.2. in length: at the rear of the vehicle.

6.7.4. Geometric visibility

Horizontal angle: 80° to left and to right for a single lamp:
the horizontal angle may be 80 degrees outwards and 45° inwards for each pair of lamps.

Vertical angle: 15° above and below the horizontal.

However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

6.7.5. Orientation

Rearwards.

6.7.6. 'Circuit-closed' tell-tale

Optional: Its function shall be performed by the device prescribed for the front position lamp.

6.7.7. Other requirements

If a rear position lamp is reciprocally incorporated with a direction indicator, the electrical connection of the rear position lamp on the relevant side of the vehicle or the reciprocally incorporated part of it may be such that it is switched OFF during the entire period (both ON and OFF cycle) of activation of the direction indicator lamp.

6.8. Rear retro-reflector, non-triangular

6.8.1. Number

One or two.

6.8.2. Arrangement

No special requirement.

6.8.3. Position

In height: not less than 250 mm nor more than 900 mm above the ground;

6.8.4. Geometric visibility

Horizontal angle: 30° to left and to right for a single reflector;
30° outwards and 10° inwards for each pair of reflectors;

Vertical angle: 15° above and below the horizontal.

However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

6.8.5. Orientation

Rearwards.

6.9. Vehicle-hazard warning signal

6.9.1. The signal shall be given by simultaneous operation of the direction indicator lamps in accordance with the requirements of paragraph 6.3 above.

6.9.2. Electrical connections

The signal shall be given by means of a separate control enabling all the direction indicators to be supplied with current simultaneously. In addition, it may be activated automatically in the event of a vehicle being involved in a collision or after the de-activation of the emergency stop signal, as specified in paragraph 6.14 below. In such cases, it may be turned OFF manually.

6.9.3. 'Circuit-closed' tell-tale

Mandatory. Flashing red signal lamp or, in the case of separate tell-tales, the simultaneous operation of the tell-tale prescribed in paragraph 6.3.8.

6.9.4. Other requirements

Light flashing 90 ± 30 times per minute.

Operation of the lamp-signal control shall be followed within not more than one second by the appearance of the light and within not more than one-and-one-half seconds by the first extinction of the light.

6.10. Front fog lamp

6.10.1. Number

One or two.

- 6.10.2. Arrangement
No special requirement.
- 6.10.3. Position
- 6.10.3.1. In width: for a single lamp the centre of reference shall be in the median longitudinal plane of the vehicle; or the edge of the illuminating surface which is nearest to that plane shall be not more than 250 mm away from it;
- 6.10.3.2. In height: not less than 250 mm above the ground. No point on the illuminating surface shall be higher than the highest point on the illuminating surface of the passing-beam headlamp.
- 6.10.3.3. In length: at the front of the vehicle. This requirement shall be deemed to be satisfied if the light emitted does not cause discomfort to the driver either directly, or indirectly through the rear-view mirrors and/or other reflecting surfaces of the vehicle.
- 6.10.4. Geometric visibility
Defined by angles α and β as specified in paragraph 2.13 of UN Regulation No 48:
- α = 5° upwards and downwards;
- β = 45° to left and to right for a single lamp, except for an off-centre light, in which case the inward angle β = 10°;
45° outwards and 10° inwards for each pair of lamps
- 6.10.5. Orientation
Forwards. The lamp(s) may move in line with the steering angle.
- 6.10.6. May not be combined with any other front lamp.
- 6.10.7. 'Circuit-closed' tell-tale
Optional; non-flashing green signal.
- 6.10.8. Other requirements
None.
- 6.10.9. Electrical connections
It shall be possible to switch the fog lamp(s) on or off independently of the driving-beam headlamp(s) and/or passing-beam headlamp(s).
- 6.11. Rear fog lamp
- 6.11.1. Number
One or two.
- 6.11.2. Arrangement
No special requirement.
- 6.11.3. Position
- 6.11.3.1. In height: not less than 250 mm nor more than 900 mm above the ground;
- 6.11.3.2. In length at the rear of the vehicle.

- 6.11.3.3. The distance between the illuminating surface of the rear fog lamp and that of the stop lamp shall not be less than 100 mm.
- 6.11.4. Geometric visibility
Defined by angles α and β as specified in paragraph 2.13 of UN Regulation No 48:
- α = 5° upwards and downwards;
 β = 25° to left and to right for a single lamp;
25° outwards and 10° inwards for each pair of lamps.
- 6.11.5. Orientation
Rearwards.
- 6.11.6. Electrical connections
They shall be such that the rear fog lamp can light up only when one or more of the following lamps are switched on: driving-beam headlamp, passing-beam headlamp, front fog lamp.
If there is a front fog lamp, it shall be possible to switch off the rear fog lamp independently of the front fog lamp.
The rear fog lamp(s) may continue to operate until the position lamps are switched off and they shall remain off until deliberately switched on again.
- 6.11.7. 'Circuit-closed' tell-tale
Mandatory. Non-flashing amber signal lamp.
- 6.11.8. Other requirements
None.
- 6.12. Side retro-reflector, non-triangular
- 6.12.1. Number per side
One or two.
- 6.12.2. Arrangement
No special requirement.
- 6.12.3. Position
- 6.12.3.1. On the side of the vehicle.
- 6.12.3.2. In height: not less than 300 mm nor more than 900 mm above the ground;
- 6.12.3.3. In length: should be placed in such a position that under normal conditions it may not be masked by the driver's or passenger's clothes.
- 6.12.4. Geometric visibility
Horizontal angles β = 30° to the front and to the rear.
Vertical angles α = 15° above and below the horizontal.
However, where a lamp is mounted below 750 mm (measured according to the provisions of paragraph 5.7), the downward angle of 15° may be reduced to 5°.

6.12.5. Orientation

The reference axis of the retro-reflectors shall be perpendicular to the vehicle's median longitudinal plane and directed outwards. The front side retro-reflectors may move with the steering angle.

6.13. Daytime running lamp

6.13.1. Presence

Optional for motorcycles.

6.13.2. Number

One or two of approved type according to UN Regulation No 87 or UN Regulation No 148.

6.13.3. Arrangement

No special requirement.

6.13.4. Position

6.13.4.1. In width:

6.13.4.1.1. An independent daytime running lamp may be installed above, below or to one side of another front lamp: If these lamps are one above the other, the reference centre of the daytime running lamp shall be located within the median longitudinal plane of the vehicle; if these lamps are side by side, the edge of the illuminating surface shall not be more than 250 mm from the median longitudinal plane of the vehicle.

6.13.4.1.2. A daytime running lamp, that is reciprocally incorporated with another front lamp (driving-beam headlamp or front position lamp), shall be fitted in such a way that the edge of the illuminated surface lies not more than 250 mm from the median longitudinal plane of the vehicle.

6.13.4.1.3. Two daytime running lamps, of which either one or both are reciprocally incorporated with another front lamp, shall be installed in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.

6.13.4.1.4. In the case of two daytime running lamps, the distance separating the illuminating surfaces shall not exceed 420 mm.

6.13.4.1.5. The maximum separation distance is not applicable when the daytime running lamps:

- (a) Are grouped, combined or reciprocally incorporated with another headlamp, or
- (b) Are within the projection of the frontal silhouette of the motorcycle on an orthogonal plane perpendicular to the longitudinal median plane of the vehicle.

6.13.4.2. In height:

Above the ground not less than 250 mm and not more than 1 500 mm.

6.13.4.3. In length:

At the front of the vehicle.

6.13.5. Geometric visibility

Horizontal: Outwards 20° and inwards 10°.

Vertical: Upwards 10° and downwards 10°.

6.13.6. Orientation

Towards the front. The lamp(s) may move in line with the steering angle.

6.13.7. Electrical connections

- 6.13.7.1. The daytime running lamp shall switch OFF automatically when the headlamps are switched ON, except when the latter are used to give intermittent luminous warnings at short intervals.

The rear position lamp shall be switched ON when the daytime running lamp(s) is/are switched ON. The front position lamp(s) and the rear-registration-plate illuminating device may be switched ON individually or together, when the daytime running lamp(s) is/are switched ON.

- 6.13.7.2. If the distance between the front direction indicator lamp and the daytime running lamp is equal or less than 40 mm, the electrical connections of the daytime running lamp on the relevant side of the vehicle may be such that either:

- (a) It is switched OFF; or
- (b) Its luminous intensity is reduced during the entire period (both ON and OFF cycle) of activation of a front direction indicator lamp.

- 6.13.7.3. If a direction indicator lamp is reciprocally incorporated with a daytime running lamp, the electrical connections of the daytime running lamp on the relevant side of the vehicle shall be such that the daytime running lamp is switched OFF during the entire period (both ON and OFF cycle) of activation of the direction indicator lamp.

6.13.8. Tell-tale

Closed-circuit green tell-tale, optional.

6.13.9. Other requirements

The DRL symbol in ISO 2575:2004 — Road vehicles. Symbols for controls, indicators and tell-tales, may be used to inform the driver that the daytime running lamp is on.

6.14. Emergency stop signal

6.14.1. Presence

Optional.

The emergency stop signal shall be given by the simultaneous operation of all the stop or direction indicator lamps fitted as described in paragraph 6.14.7.

6.14.2. Number

As specified in paragraph 6.3.1 or 6.4.1.

6.14.3. Arrangement

As specified in paragraph 6.3.2 or 6.4.2.

6.14.4. Position

As specified in paragraph 6.3.3 or 6.4.3.

6.14.5. Geometric visibility

As specified in paragraph 6.3.4 or 6.4.4.

6.14.6. Orientation

As specified in paragraph 6.3.5 or 6.4.5.

6.14.7. Electrical connections

6.14.7.1. All the lamps of the emergency stop signal shall flash in phase at a frequency of $4,0 \pm 1,0$ Hz.

6.14.7.1.1. However, if any of the lamps of the emergency stop signal to the rear of the vehicle use filament light sources the frequency shall be $4,0 + 0,0/-1,0$ Hz.

6.14.7.2. The emergency stop signal shall operate independently of other lamps.

6.14.7.3. The emergency stop signal shall be activated and deactivated automatically.

6.14.7.3.1. The emergency stop signal shall be activated only when the vehicle speed is above 50 km/h and the braking system is providing the emergency braking logic signal defined in UN Regulation No 78.

6.14.7.3.2. The emergency stop signal shall be automatically deactivated if the emergency braking logic signal as defined in UN Regulation No 78 is no longer provided or if the vehicle-hazard warning signal is activated.

6.14.8. Tell-tale
Optional.

6.14.9. Other requirements
None.

6.15. Exterior courtesy lamp

6.15.1. Presence
Optional for motorcycles.

6.15.2. Number
One or two; however further exterior courtesy lamps to illuminate footrest are permitted. Each footrest shall be illuminated by not more than one lamp.

6.15.3. Arrangement
No special requirement, however the requirements of paragraph 6.15.9.3 apply.

6.15.4. Position
No special requirement.

6.15.5. Geometric visibility
No special requirement.

6.15.6. Orientation
No special requirement.

6.15.7. Electrical connections
No special requirement.

6.15.8. Tell-tale
No special requirement.

6.15.9. Other requirements

6.15.9.1. The exterior courtesy lamp shall not be activated unless the vehicle is stationary and one or more of the following conditions is satisfied:

- (a) The device which starts and/or stops the engine (propulsion system) is set in a position which makes it impossible for the engine (propulsion system) to operate; or
- (b) A load compartment is opened for access.

The provisions of paragraph 5.9 shall be met in all fixed positions of use.

6.15.9.2. Approved lamps emitting white light with the exception of main beam headlamps and day time running lamps may be activated as courtesy lamp function. They may also be activated together with the exterior courtesy lamps and the condition of paragraphs 5.10 and 5.11 above may not apply.

6.15.9.3. The Technical Service shall, to the satisfaction of the Type Approval Authority, perform a visual test to verify that there is no direct visibility of the apparent surface of the exterior courtesy lamps, if viewed by an observer moving on the boundary of a zone on a transverse plane 10 m from the front of the vehicle, a transverse plane 10 m from the rear of the vehicle, and two longitudinal planes 10 m from each side of the vehicle; these four planes to extend from 1 m to 3 m above and perpendicular to the ground as shown in Annex 7.

In addition to the conditions described in paragraph 5.4, the requirements prescribed above shall be verified in the following vehicle conditions:

Stand:	On a prop stand or a centre stand, and both if applicable
Steering:	Straight ahead, and locked in each available position

At the request of the applicant and with the consent of the Technical Service this requirement may be verified by a drawing or simulation.

7. MODIFICATIONS OF THE VEHICLE TYPE OR OF THE INSTALLATION OF ITS LIGHTING AND LIGHT-SIGNALLING DEVICES

7.1. Every modification of the vehicle type, or of the installation of its lighting or light-signalling devices, or of the list referred to in paragraph 3.2.2 above, shall be notified to the Type Approval Authority which approved that vehicle type. The Type Approval Authority may then either;

7.1.1. Consider that the modification made are unlikely to have appreciable adverse effects and that in any case the vehicle still complies with the requirements; or

7.1.2. Require a further test report from the Technical Service responsible for conducting tests.

7.2. Confirmation or refusal of approval, specifying the alternatives, shall be communicated by the procedure specified in paragraph 4.3 above to the Parties to the Agreement which apply this Regulation.

7.3. The Type Approval Authority issuing the extension of approval shall assign a series number for such an extension and inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

8. CONFORMITY OF PRODUCTION

The conformity of production procedures shall comply with those set out in the Agreement, Schedule 1 (E/ECE/TRANS/505/Rev.3), with the following requirements:

8.1. Motorcycles approved under this Regulation shall be so manufactured as to conform to the type approved, by meeting the requirements set out in paragraphs 5. and 6. above.

8.2. The minimum requirements for conformity of production control procedures set forth in Annex 5 to this Regulation shall be complied with.

8.3. The Type Approval Authority which has granted type approval may at any time verify the conformity control methods applied in each production facility. The normal frequency of these verifications shall be once a year.

9. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

9.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirement laid down in paragraph 8.1 above is not met or if the vehicle has failed to pass the checks prescribed in paragraph 8. above.

9.2. If a Party to the Agreement which applies this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties to the Agreement which apply this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

10. PRODUCTION DEFINITELY DISCONTINUED

If the holder of an approval completely ceases to manufacture a vehicle type approved in accordance with this Regulation, he shall so inform the Type Approval Authority which granted the approval. Upon receiving the relevant communication that Authority shall inform thereof the other Parties to the Agreement applying this Regulation, by means of a communication form conforming to the model in Annex 1 to this Regulation.

11. TRANSITIONAL PROVISIONS

11.1. As from the official date of entry into force of Supplement 10 to the 01 series of amendments, no Contracting Party applying this Regulation shall refuse to grant approvals under this Regulation as amended by Supplement 10 to the 01 series of amendments.

11.2. As from 60 months after the date of entry into force mentioned in paragraph 11.1 above, Contracting Parties applying this Regulation shall grant approvals only if the vehicle type with regard to the number and mode of installation of the lighting and light-signalling devices corresponds to the requirements of the Supplement 10 to the 01 series of amendments to this Regulation.

11.3. Existing approvals granted under this Regulation before the date mentioned in paragraph 11.2 above shall remain valid. In the case of vehicles first registered more than 84 months after the date of entry into force mentioned in paragraph 11.1 above Contracting Parties applying this Regulation may refuse the vehicle type with regard to the number and mode of installation of the lighting and light-signalling devices which do not meet the requirements of the Supplement 10 to the 01 series of amendments to this Regulation.

11.4. As from the official date of entry into force of the 02 series of amendments, no Contracting Party applying this Regulation shall refuse to grant approvals under this Regulation as amended by the 02 series of amendments.

11.5. As from 48 months after the date mentioned in paragraph 11.4 above, Contracting Parties applying this Regulation shall grant approvals only if the vehicle type with regard to the number and mode of installation of the lighting and light-signalling devices corresponds to the requirements of the 02 series of amendments to this Regulation.

11.6. Existing approvals granted under this Regulation before the date mentioned in paragraph 11.5 above shall remain valid.

12. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF TYPE APPROVAL AUTHORITIES

The Contracting Parties to the 1958 Agreement which apply this Regulation shall communicate to the United Nations Secretary-General the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval, extension or refusal or withdrawal of approval, issued, in other countries, are to be sent.

ANNEX 1

COMMUNICATION

(maximum format: A4 (210 × 297 mm))



issued by: Name of administration:

.....

.....

.....

Concerning ⁽²⁾:

Approval granted

Approval extended

Approval refused

Approval withdrawn

Production definitively discontinued

of a type of category L₃ vehicle with regard to the installation of lighting and light-signalling devices, pursuant to UN Regulation No 53.

Approval No

Extension No

1. Trade name or mark of the vehicle:
2. Manufacturer's name for the type of vehicle:
3. Manufacturer's name and address:
4. If applicable, name and address of the manufacturer's representative:
5. Submitted for approval on:
6. Technical Service responsible for conducting approval tests:
7. Date of test report:
8. Number of test report:
9. Concise description:

Lighting devices on the vehicle:

- 9.1. Driving lamps: yes/no ⁽²⁾
- 9.2. Passing lamps: yes/no ⁽²⁾
- 9.3. Front fog lamps: yes/no ⁽²⁾
- 9.4. -
- 9.5. Direction indicators: yes/no ⁽²⁾
- 9.6. -
- 9.7. Repeating side direction indicators: yes/no ⁽²⁾
- 9.8. Hazard warning signal: yes/no ⁽²⁾
- 9.9. Stop lamps: yes/no ⁽²⁾
- 9.10. Rear-registration-plate illuminating device: yes/no ⁽²⁾
- 9.11. Front position (side) lamps: yes/no ⁽²⁾
- 9.12. Rear position (side) lamps: yes/no ⁽²⁾

⁽¹⁾ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

⁽²⁾ Strike out what does not apply.

- 9.13. Rear fog lamps: yes/no ⁽³⁾
- 9.14. -
- 9.15. -
- 9.16. Rear retro-reflectors, non-triangular: yes/no ⁽³⁾
- 9.17. -
- 9.18. -
- 9.19. Side retro-reflectors, non-triangular: yes/no ⁽³⁾
- 9.20. Equivalent lamps: yes/no ⁽³⁾
- 9.21. Emergency stop signal: yes/no ⁽³⁾
- 9.22. Exterior courtesy lamp: yes/no ⁽³⁾
10. Any comments:
11. Masses as declared by the manufacturer ⁽⁴⁾
- 11.1. Mass in running order:
- Total mass: kg
- Mass on the front wheel: kg
- Mass on the rear wheel: kg
- 11.2. Gross vehicle mass:
- Total mass: kg
- Mass on the front wheel: kg
- Mass on the rear wheel: kg
12. Position of the approval mark:
13. Reason(s) for extension (if applicable):
14. Approval granted/refused/extended/withdrawn ⁽³⁾:
15. Place:
16. Date:
17. Signature:
18. The list of documents deposited with the Type Approval Authority which has granted the approval is annexed to this communication and may be obtained upon request.
-

⁽³⁾ Strike out what does not apply.


⁽⁴⁾ These sections only need to be completed if the test according to paragraph 6.2.5.4 of this Regulation is performed.

ANNEX 2

ARRANGEMENT OF APPROVAL MARKS

Model A

(See paragraph 4.4 of this Regulation)

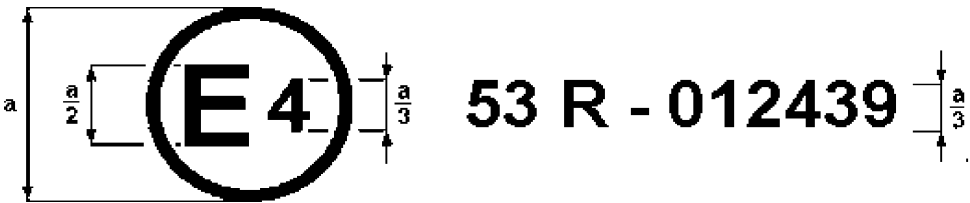


a = 8 mm min

The above approval mark affixed to a motorcycle shows that the vehicle type concerned has, with regard to the installation of lighting and light-signalling devices, been approved in the Netherlands (E 4), pursuant to UN Regulation No 53, as amended by the 01 series of amendments. The approval number indicates that the approval was granted in accordance with the requirements of UN Regulation No 53.

Model B

(see paragraph 4.5 of this Regulation)

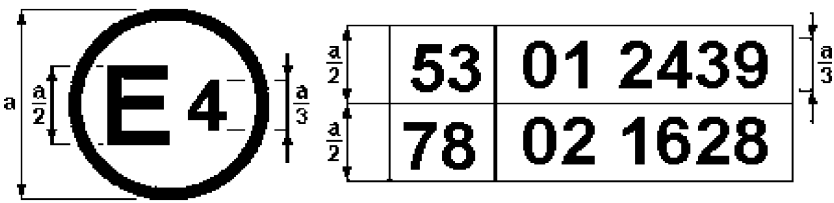


a = 8 mm min

The above approval mark affixed to a motorcycle shows that the vehicle type concerned has been approved in the Netherlands (E 4) pursuant to UN Regulations Nos 53 and 78 ⁽¹⁾. The approval numbers indicate that, at the dates when the respective approvals were granted, UN Regulation No 53 included the 01 series of amendments and UN Regulation No 78 already included the 02 series of amendments.

⁽¹⁾ The second number is given merely as an example.

ANNEX 3

LAMP SURFACES, AXIS AND CENTRE OF REFERENCE, AND ANGLES OF GEOMETRIC VISIBILITY

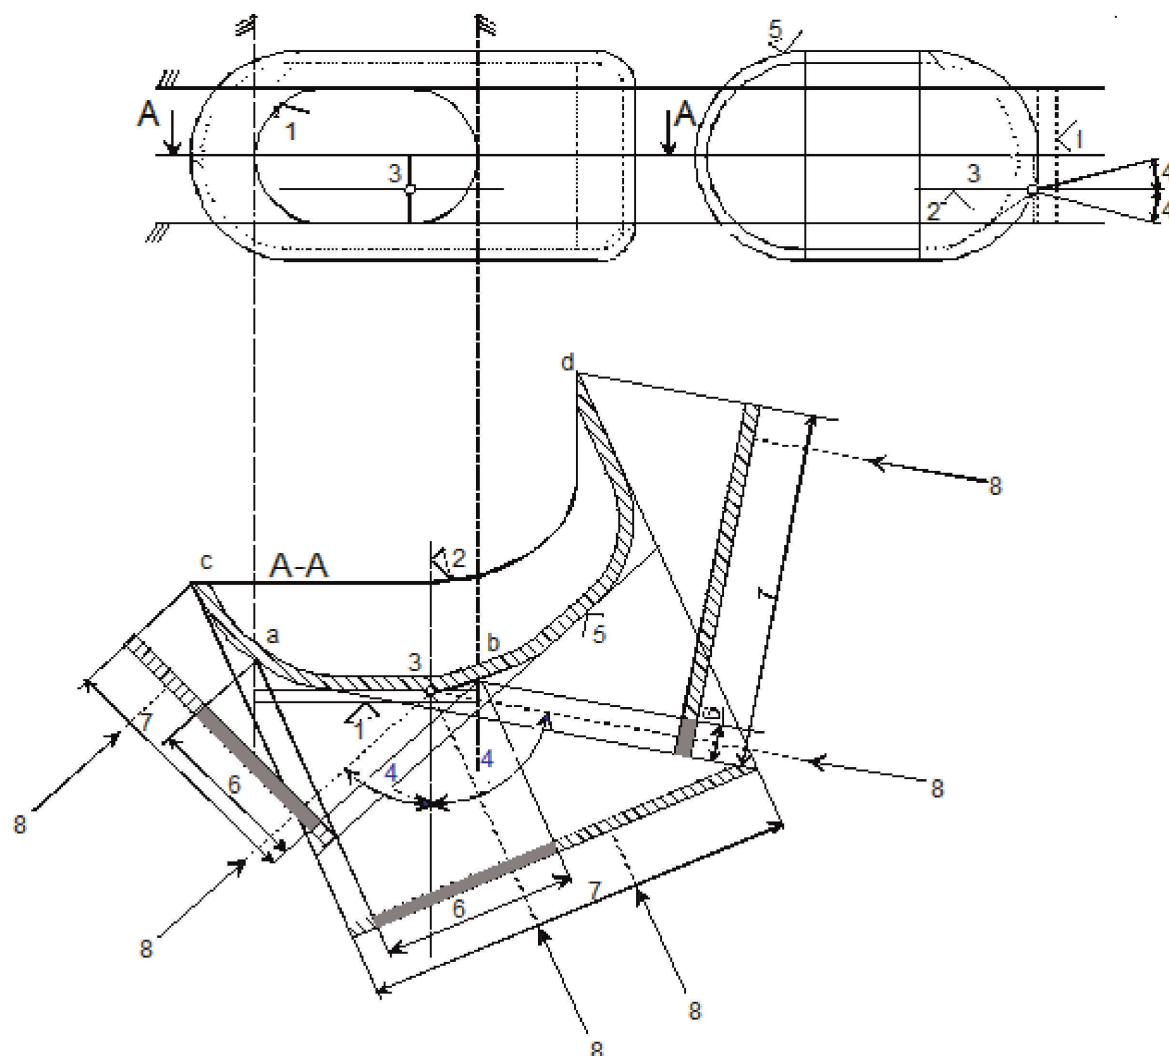


Key

1. Illuminating surface
2. Axis of reference
3. Centre of reference
4. Angle of geometric visibility
5. Light-emitting surface
6. Apparent surface based on illuminating surface
7. Apparent surface based on light-emitting surface
8. Direction of visibility


Note: Notwithstanding the drawing, the apparent surface is to be considered as tangent to the light-emitting surface.

Illuminating surface in comparison with light-emitting surface
(See paragraphs 2.8 and 2.9 of this Regulation)

Sketch A

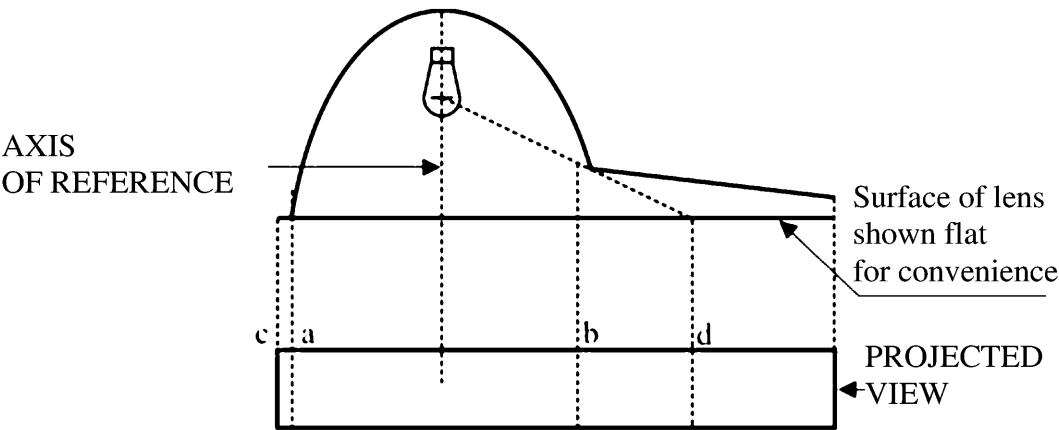

Sketch B

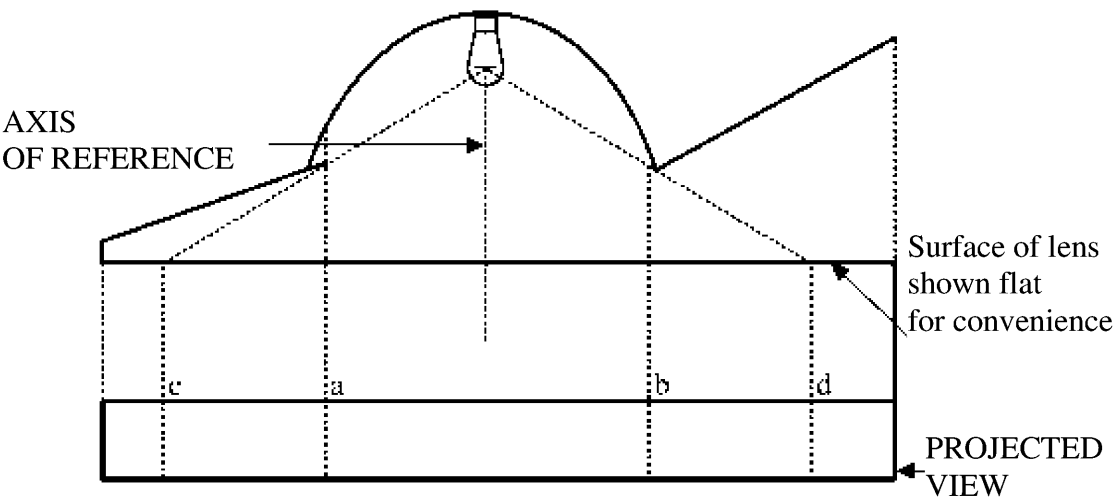

	Illuminating surface	Light-emitting surface
Edges are	a and b	c and d

ANNEX 4

FORWARD VISIBILITY OF RED LIGHTS AND REARWARD VISIBILITY OF WHITE LIGHTS

(See paragraph 5.9 of this Regulation)

Figure 1

Forward visibility of a red lamp


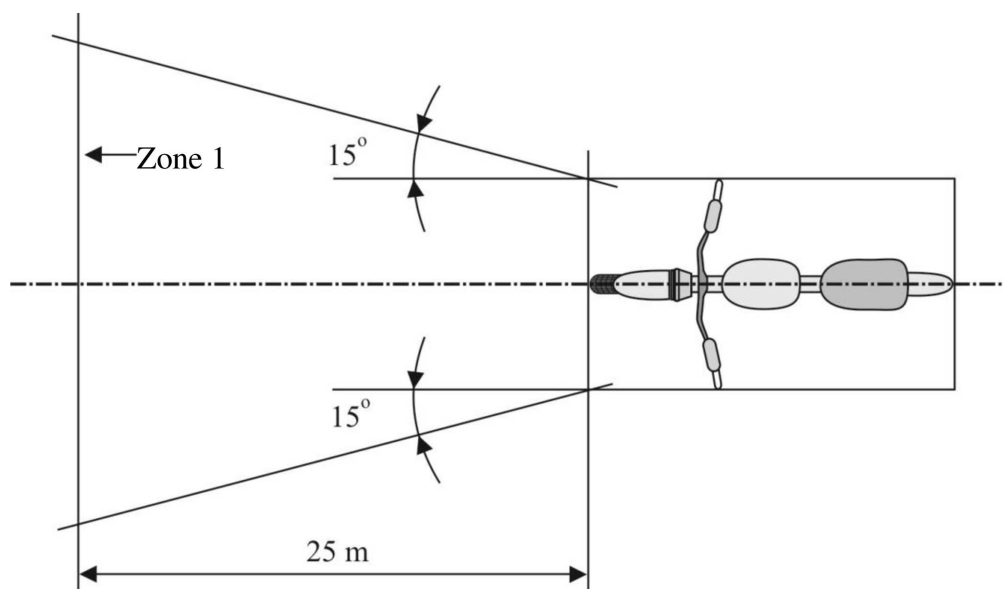


Figure 2

Rearward visibility of a white lamp

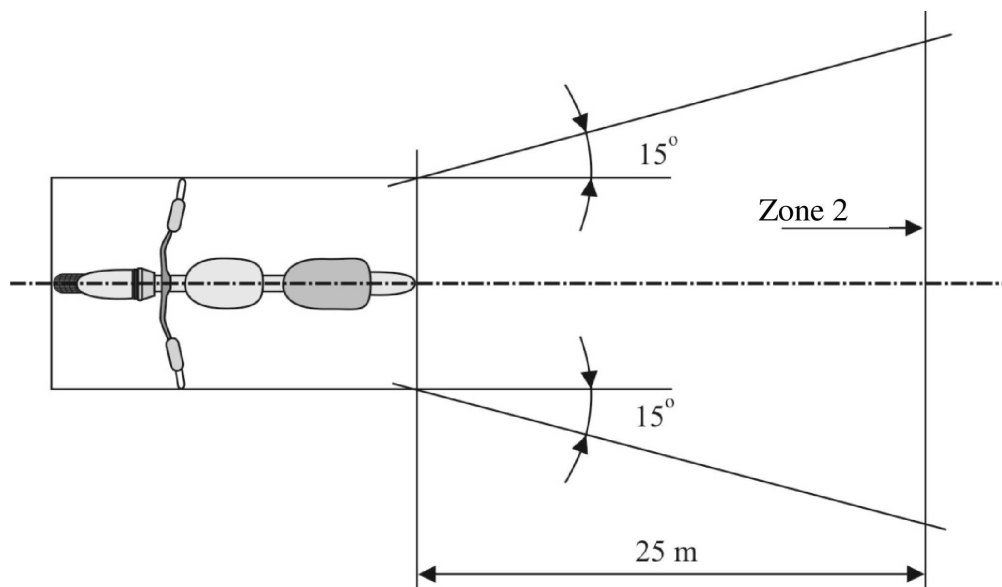

ANNEX 5

CONTROL OF CONFORMITY OF PRODUCTION

1. Tests

1.1. Position of lamps

The position of the lamps as specified in paragraph 6 of this Regulation shall be checked in accordance with the general requirements set out in paragraph 5 of this Regulation. The values measured for the distances shall be such that the individual specifications applicable to each lamp are fulfilled.

1.2. Visibility of lamps

1.2.1. The angles of geometric visibility shall be checked in accordance with paragraph 2.13 of UN Regulation No 48. The values measured for the angles shall be such that the individual specifications applicable to each lamp are fulfilled except that the limits of the angles may have an allowance corresponding to the $\pm 3^\circ$ variation permitted in paragraph 5.3 of this Regulation for the mounting of the light-signalling devices.

1.2.2. The visibility of red light towards the front and of white light towards the rear shall be checked in accordance with paragraph 5.9 of this Regulation.

1.3. Alignment of passing-beam headlamps towards the front

1.3.1. Initial downward inclination

(The initial downward inclination of the cut-off of the passing-beam shall be checked against the requirements of paragraph 6.2.5 of this Regulation).

1.4. Electrical connections and tell-tales

The electrical connections shall be checked by switching on every lamp supplied by the electrical system of the motorcycle.

The lamps and tell-tales shall function in accordance with the provisions set out in paragraphs 5.10 to 5.12 of this Regulation and with the individual specifications, applicable to each lamp.

1.5. Light intensities

1.5.1. Driving-beam headlamps


The aggregate maximum intensity of the driving-beam headlamp(s) shall be such that the requirement in paragraph 6.1.9 of this Regulation is fulfilled.

1.6. The presence, number, colour, arrangement and, where applicable, the category of lamps shall be checked by visual inspection of the lamps and their markings. These shall be such that the requirements set out in paragraph 5.13 of this Regulation and the individual specifications applicable to each lamp are fulfilled.

ANNEX 6

EXPLANATION ABOUT 'THE HORIZONTAL INCLINATION', 'THE BANK ANGLE' AND THE ANGLE ' δ '

Figure 1

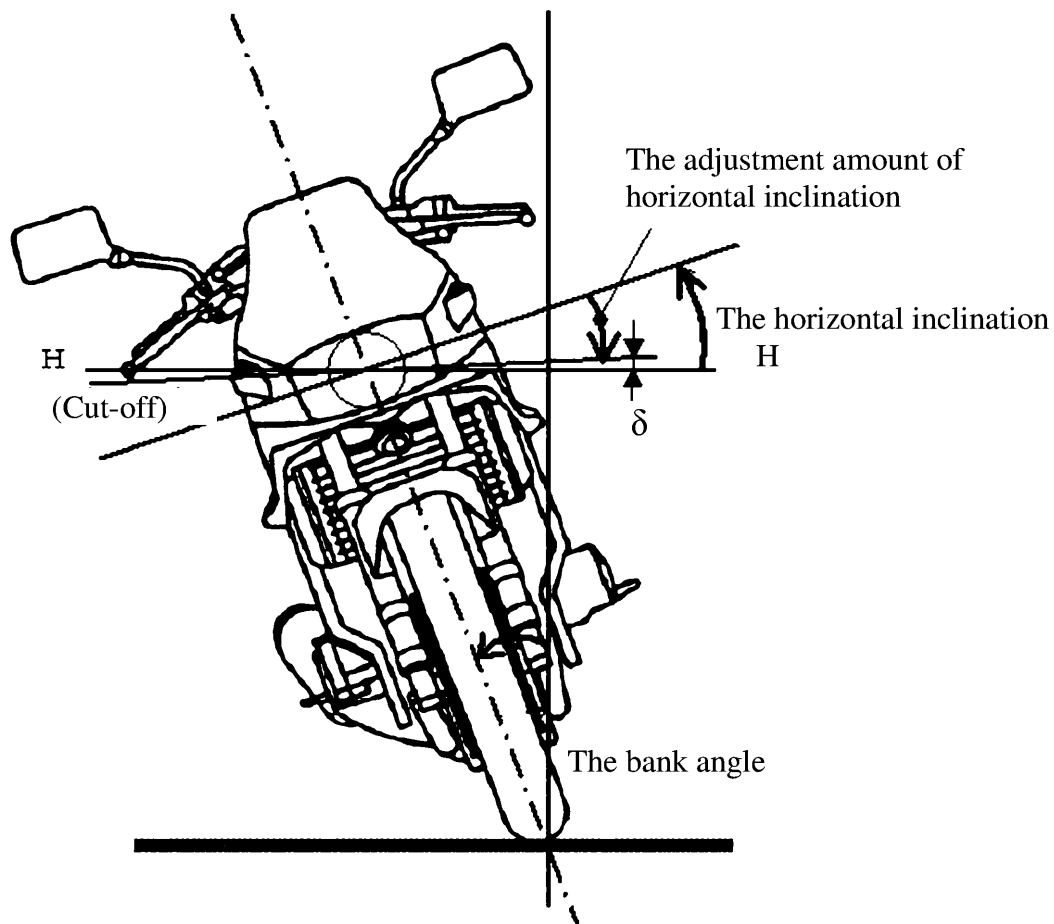


Note: This figure shows the motorcycle is banked to the right side.

ANNEX 7


OBSERVING AREA TOWARDS THE APPARENT SURFACE OF EXTERIOR COURTESY LAMPS

Zones of observation

This drawing shows the zone from one side, the other zones are from the front, the rear and from the other side of the vehicle.

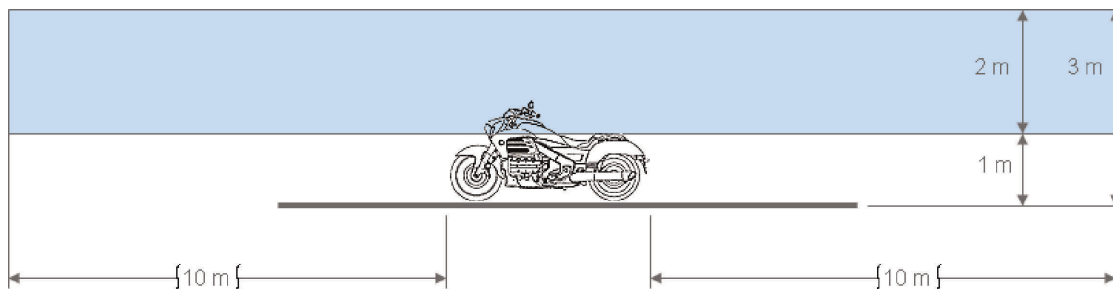

Boundaries of the zones

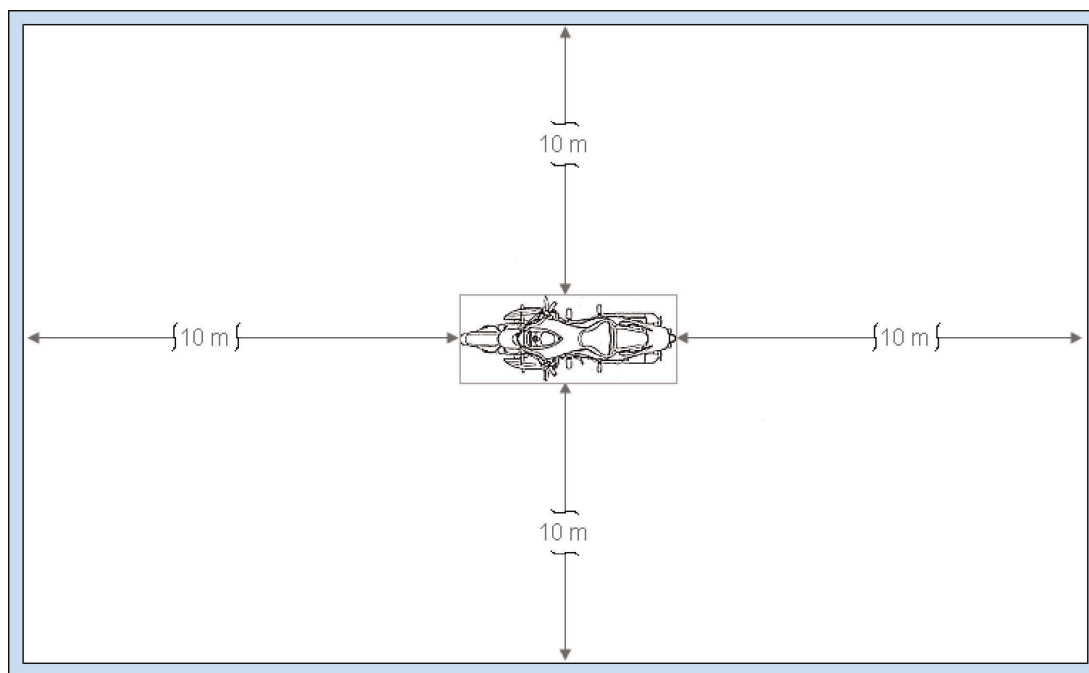

UN Regulation No 74 — Uniform provisions concerning the approval of category L₁ vehicles with regard to the installation of lighting and light-signalling devices [2020/32]

Incorporating all valid text up to:

Supplement 11 to the 01 series of amendments — Date of entry into force: 15 October 2019

CONTENTS

REGULATION

1. Scope
2. Definitions
3. Application for approval
4. Approval
5. General specifications
6. Individual specifications
7. Registration of vehicles
8. Conformity of production
9. Penalties for non-conformity of production
10. Modification and extension of approval of a vehicle type with regard to the installation of lighting and light-signalling devices
11. Production definitely discontinued
12. Transitional provisions
13. Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities

Annexes

- Annex 1 — Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a vehicle type (moped) with regard to the installation of lighting and light-signalling devices, pursuant to Regulation No 74
- Annex 2 — Arrangements of approval marks
- Annex 3 — Lamp surfaces, axis and centre of reference, and angles of geometric visibility
- Annex 4 — Forward visibility of red lights and rearward visibility of white lights
- Annex 5 — Control of conformity of production

1. SCOPE

This Regulation applies to vehicles of category L₁ ⁽¹⁾ with regard to the installation of lighting and light-signalling devices.
2. DEFINITIONS

For the purpose of this Regulation, the definitions given in the latest series of amendments to UN Regulation No 48 in force at the time of application for type approval shall apply, unless otherwise specified in this Regulation.

 - 2.1. 'Vehicle type' means a category of vehicles which do not differ from each other in such essential respects as:
 - 2.1.1. The dimensions and external shape of the vehicle;

⁽¹⁾ As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2. - <http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html>

- 2.1.2. The number and position of the devices;
- 2.1.3. The following shall likewise not be deemed to be 'vehicles of a different type':
- 2.1.3.1. Vehicles which differ within the meaning of paragraphs 2.1.1 and 2.1.2 above but not in such a way as to entail a change in the kind, number, position and geometric visibility of the lamps prescribed for the vehicle type in question;
- 2.1.3.2. Vehicles on which lamps approved under one of the Regulations annexed to the 1958 Agreement, or lamps allowed in the country in which the vehicles are registered, are fitted, or are absent where their fitting is optional;
- 2.2. 'Unladen vehicle' means a vehicle without a driver, or passenger, and unladen, but with its fuel tank full and its normal complement of tools;
- 2.3. 'Lamp' means a device designed to illuminate the road or to emit a light signal to other road users. Rear registration plate lamp and retro-reflectors are likewise to be regarded as lamps;
- 2.3.1. 'Equivalent lamps' means lamps having the same function and authorised in the country in which the vehicle is registered; such lamps may have different characteristics from those of the lamps with which the vehicle is equipped at the time of approval, on condition that they satisfy the requirements of this Regulation;
- 2.3.2. 'Independent lamps' means devices having separate illuminating surfaces, separate light sources and separate lamp bodies;
- 2.3.3. 'Grouped lamps' means devices having separate illuminating surfaces and separate light sources, but a common lamp body;
- 2.3.4. 'Combined lamps' means devices having separate illuminating surfaces, but a common light source and a common lamp body;
- 2.3.5. 'Reciprocally incorporated' means devices having separate light sources or a single light source operating under different conditions (for example, optical, mechanical, electrical differences), totally or partially common illuminating surfaces and a common lamp body;
- 2.3.6. 'Front position lamp' means the lamp used to indicate the presence of the vehicle when viewed from the front;
- 2.3.7. 'Retro-reflector' means a device used to indicate the presence of a vehicle by the reflection of light emanating from a light source not connected to the vehicle, the observer being situated near the source;
- For the purpose of this Regulation, retro-reflecting number plates are not considered as retro-reflectors;
- 2.3.8. 'Direction-indicator lamp' means the lamp used to indicate to other road-users that the driver intends to change direction to the right or to the left;
- A direction-indicator lamp or lamps may also be used according to provisions of UN Regulation No 97.
- 2.3.9. 'Rear position lamp' means the lamp used to indicate the presence of the vehicle when viewed from the rear;
- 2.4. 'Light-emitting surface' of a 'lighting device', 'light-signalling device' or a retro-reflector means all or part of the exterior surface of the transparent material as declared in the request for approval by the manufacturer of the device on the drawing, see Annex 3;

- 2.5. *'Illuminating surface'* (see Annex 3);
- 2.5.1. *'Illuminating surface of a lighting device'* (driving beam (main beam) headlamp and passing beam (dipped beam) headlamp) means the orthogonal projection of the full aperture of the reflector, or in the case of headlamps with an ellipsoidal reflector of the 'projection lens', on a transverse plane. If the lighting device has no reflector, the definition of paragraph 2.5.2 shall be applied. If the light emitting surface of the lamp extends over part only of the full aperture of the reflector, then the projection of that part only is taken into account.
- n the case of a passing beam headlamp, the illuminating surface is limited by the apparent trace of the cut-off on to the lens. If the reflector and lens are adjustable relative to one another, the mean adjustment should be used;
- 2.5.2. *'Illuminating surface of a light-signalling device other than a retro-reflector'* (front position lamp, direction indicator lamp, stop lamp and rear position lamp) means the orthogonal projection of the lamp in a plane perpendicular to its axis of reference and in contact with the exterior light-emitting surface of the lamp, this projection being bounded by the edges of screens situated in this plane, each allowing only 98 per cent of the total luminous intensity of the light to persist in the direction of the axis of reference. To determine the lower, upper and lateral limits of the illuminating surface, only screens with horizontal or vertical edges shall be used;
- 2.5.3. *'Illuminating surface of a retro-reflector'* (paragraph 2.3.7) means the orthogonal projection of a retro-reflector in a plane perpendicular to its axis of reference and delimited by planes continuous to the outermost parts of the retro-reflector's optical system and parallel to that axis. For the purposes of determining the lower, upper and lateral edges of the device, only horizontal and vertical planes shall be considered;
- 2.6. The *'apparent surface'* for a defined direction of observation means, at the request of the manufacturer or his duly accredited representative, the orthogonal projection of:
- either the boundary of the illuminating surface projected on the exterior surface of the lens (a-b), or the light-emitting surface (c-d), in a plane perpendicular to the direction of observation and tangential to the most exterior point of the lens (see Annex 3 to this Regulation);
- 2.7. *'Centre of reference'* means the intersection of the axis of reference with the exterior light-emitting surface; it is specified by the manufacturer of the lamp;
- 2.8. *'Angles of geometric visibility'* means the angles which determine the field of the minimum solid angle in which the apparent surface of the lamp must be visible. That field of the solid angle is determined by the segments of the sphere of which the centre coincides with the centre of reference of the lamp and the equator is parallel with the ground. These segments are determined in relation to the axis of reference. The horizontal angles β , correspond to the longitude and the vertical angles α to the latitude. There must be no obstacle on the inside of the angles of geometric visibility to the propagation of light from any part of the apparent surface of the lamp observed from infinity. If measurements are taken closer to the lamp, the direction of observation must be shifted parallel to achieve the same accuracy.
- On the inside of the angles of geometric visibility no account is taken of obstacles, if they were already presented when the lamp was type approved.
- If, when the lamp is installed, any part of the apparent surface of the lamp is hidden by any further parts of the vehicle, proof shall be furnished that the part of the lamp not hidden by obstacles still conforms to the photometric values prescribed for the approval of the device as an optical unit (see Annex 3 of this Regulation). Nevertheless, when the vertical angle of geometric visibility below the horizontal may be reduced to 5° (lamp at less than 750 mm above the ground) the photometric field of measurements of the installed optical unit may be reduced to 5° below the horizontal.
- 2.9. *'Extreme outer edge'*, on either side of the vehicle means the plane parallel to the median longitudinal plane of the vehicle and tangent to the latter's lateral outer edge, disregarding rear-view mirrors, direction indicators, position lamps and retro-reflectors;
- 2.10. *'Over-all width'* means the distance between the two vertical planes defined in paragraph 2.9 above;

- 2.11. 'A single lamp' means a device or part of a device, having one function and one apparent surface in the direction of the reference axis (see paragraph 2.6 of this Regulation) and one or more light sources.

For the purpose of installation on a vehicle, a 'single lamp' also means any assembly of two independent or grouped lamps, whether identical or not, having the same function, if they are installed so that the projection of their apparent surfaces in the direction of the reference axis occupies not less than 60 per cent of the smallest rectangle circumscribing the projections of the said apparent surfaces in the direction of the reference axis. In such a case, each of these lamps shall, where approval is required, be approved as a type 'D' lamp. This possible combination does not apply to driving beam headlamps and passing beam headlamps.

- 2.12. 'Colour of the light emitted from the device'. The definitions of the colour of the light emitted given in UN Regulation No 48 and its series of amendments in force at the time of application for type approval shall apply to this Regulation.

3. APPLICATION FOR APPROVAL

- 3.1. The application for approval of a vehicle type with regard to the installation of its lighting and light-signalling devices shall be submitted by the vehicle manufacturer or by his duly accredited representative.

- 3.2. It shall be accompanied by the following documents and particulars, in triplicate:

- 3.2.1. A description of the vehicle type with regard to the items mentioned in paragraphs 2.1.1. and 2.1.2 above; the vehicle type shall be specified;

- 3.2.2. a list of the devices intended by the manufacturer to form the lighting and light-signalling equipment: the list may include several types of device for each function; each type shall be duly identified (national or international approval mark, if approved, name of manufacturer, etc.); in addition, the list may include in respect of each function the additional annotation 'or equivalent devices';

- 3.2.3. a layout drawing of the lighting and light-signalling installation as a whole, showing the position of the various devices on the vehicle;

- 3.2.4. If necessary, in order to verify the conformity to the prescriptions of the present Regulation, a layout drawing or drawings of each lamp showing the illuminating surface, as defined in paragraph 2.5.1 above, the light-emitting surface as defined in paragraph 2.4, the axis of reference and the centre of reference as defined in paragraph 2.7. This information is not necessary in the case of the rear registration plate illuminating device.

- 3.2.5. The application shall include a statement of the method used for the definition of the apparent surface (paragraph 2.6.).

- 3.3. An unladen vehicle fitted with a complete set of lighting and light-signalling equipment, as prescribed in paragraph 3.2.2 above, and representative of the vehicle type to be approved shall be submitted to the Technical Service responsible for conducting approval tests.

4. APPROVAL

- 4.1. If the vehicle type submitted for approval pursuant to this Regulation meets the requirements of the Regulation in respect of all the devices specified in the list, approval of that vehicle type shall be granted.

- 4.2. An approval number shall be assigned to each type approved. Its first two digits (at present 01 for the Regulation in its 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign this number to another vehicle type or to the same vehicle type submitted with equipment not specified in the list referred to in paragraph 3.2.2 above, subject to the provisions of paragraph 7 of this Regulation.

- 4.3. Notice of approval or of extension or refusal of approval or of production definitely discontinued of a vehicle type pursuant to this Regulation shall be communicated to the Parties to the Agreement applying this Regulation, by means of a form conforming to the model in Annex 1 to this Regulation.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation an international approval mark consisting of:
- 4.4.1. a circle surrounding the letter 'E' followed by the distinguishing number of country which has granted approval ⁽²⁾;
- 4.4.2. the number of this Regulation followed by the letter 'R', a dash, and the approval number to the right of the circle prescribed in paragraph 4.4.1.
- 4.5. If the vehicle conforms to a vehicle type approved, under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1 need not be repeated; in such a case the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. The approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.
- 4.8. Annex 2 to this Regulation gives examples of the arrangement of the approval marks.
5. GENERAL SPECIFICATIONS
- 5.1. The lighting and light-signalling devices shall be so fitted that in normal conditions of use, and notwithstanding the vibrations to which they may be subjected, they retain the characteristics prescribed by this Regulation and enable the vehicle to comply with the requirements of this Regulation. In particular, it shall not be possible for the lamps to be inadvertently maladjusted.
- 5.2. The illuminating lamps shall be so installed that correct adjustment of their orientation can easily be carried out.
- 5.3. For all light-signalling devices, including those mounted on the side, the reference axis of the lamp when fitted to the vehicle shall be parallel to the bearing plane of the vehicle on the road; in addition, it shall be perpendicular to the median longitudinal plane of the vehicle in the case of side retro-reflectors and parallel to that plane in the case of all other devices. A tolerance of $\pm 3^\circ$ shall be allowed in each direction. In addition, if specifications for fitting are provided by the manufacturer they shall be complied with.
- 5.4. In the absence of specific instructions, the height and orientation of the lamps shall be verified with the vehicle unladen and placed on a flat horizontal surface, its median longitudinal plane being vertical and the handlebars being in the position corresponding to the straight ahead movement.
- 5.5. In the absence of specific instructions:
- 5.5.1. single lamps or reflectors shall be mounted such that their centre of reference lies in the median longitudinal plane of the vehicle;
- 5.5.2. lamps constituting a pair and having the same function shall:
- 5.5.2.1. be mounted symmetrically in relation to the median longitudinal plane;
- 5.5.2.2. be symmetrical to one another in relation to the median longitudinal plane;

⁽²⁾ The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.6, Annex 3.

- 5.5.2.3. satisfy the same colorimetric requirements;
- 5.5.2.4. have identical nominal photometric characteristics; and
- 5.5.2.5. come on and go off simultaneously.
- 5.6. Lamps may be grouped, combined or reciprocally incorporated with one another provided that all the requirements regarding colour, position, orientation, geometric visibility, electrical connections and other requirements, if any, for each lamp are fulfilled.
- 5.7. The maximum height above ground shall be measured from the highest point and the minimum height from the lowest point of the apparent surface in the direction of the reference axis. For passing beam headlamps, the minimum height from the ground shall be measured from the lowest point of the effective outlet of the optical system (e.g. reflector, lens, projection lens) independent of its utilisation.

Where the (maximum and minimum) height above the ground clearly meets the requirements of the Regulation, the exact edges of any surface need not be determined.

When referring to the distance between lamps, the position, as regards width, shall be determined from the inner edges of the apparent surface in the direction of the reference axis.

Where the position, as regards width, clearly meets the requirements of the Regulation, the exact edges of any surface need not be determined.
- 5.8. In the absence of specific instructions, no lamps other than direction-indicator lamps and the vehicle-hazard warning signal shall be flashing lamps.
- 5.9. No red light shall be visible towards the front and no white light shall be visible towards the rear. Compliance with this requirement shall be verified as shown hereunder (see drawing in Annex 4):
 - 5.9.1. visibility of red light towards the front: there must be no direct visibility of a red light if viewed by an observer moving within zone 1 of a transverse plane situated 25 m in front of the vehicle;
 - 5.9.2. visibility of white light towards the rear: there must be no direct visibility of a white lamp if viewed by an observer moving within zone 2 of a transverse plane situated 25 m behind the vehicle;
 - 5.9.3. zones 1 and 2, as seen by the observer, are limited in their respective planes as follows:
 - 5.9.3.1. in height, by two horizontal planes 1 m and 2,20 m respectively above the ground;
 - 5.9.3.2. in width, by two vertical planes which, forming to the front and the rear respectively an angle of 15° outwards from the vehicle's median longitudinal plane, pass through the point or points of contact of vertical planes parallel to the vehicle's median longitudinal plane and delimiting the vehicle's over-all width; if there are several points of contact, the foremost shall correspond to the forward plane and the rearmost to the rearward plane.
- 5.10. The electrical connections shall be such that the front position lamp, or the passing beam headlamp, if there is no front position lamp, and the rear position lamp and any rear registration plate illuminating device cannot be switched on or off otherwise than simultaneously.
- 5.11. In the absence of specific instructions, the electrical connection shall be such that the driving beam headlamp and the passing beam headlamp cannot be switched on unless the lamps referred to in paragraph 5.10 above are likewise switched on. This requirement need not, however, be satisfied in the case of the driving beam headlamp and passing beam headlamp where their luminous warnings consist in switching on the passing-beam headlamp intermittently, at short intervals, or in switching on the passing beam headlamp and driving beam headlamp alternately at short intervals.
 - 5.11.1. The headlamp shall automatically be on when the engine is running.
- 5.12. Tell-tale lamps

5.12.1. Every tell-tale lamp shall be readily visible to a driver in the normal driving position.

5.12.2. Where a 'circuit-closed' tell-tale is prescribed by this Regulation, it may be replaced by an 'operating' tell-tale.

5.13. Colours of the lights ⁽³⁾

The colours of the lights referred to in this Regulation shall be as follows:

Driving beam headlamp:	white
Passing beam headlamp:	white
Front position lamp:	white
Front retro-reflector, non-triangular:	white
Side retro-reflector, non-triangular:	amber at the front amber or red at the rear
Pedal retro-reflector:	amber
Rear retro-reflector, non-triangular:	red
Direction-indicator lamp:	amber
Stop lamp:	red
Rear position lamp:	red
Rear-registration plate lamp:	white
Vehicle-hazard warning signal:	amber

5.14. Every vehicle submitted for approval pursuant to this Regulation shall be equipped with the following lighting and light-signalling devices:

5.14.1. passing beam headlamp (paragraph 6.2);

5.14.2. rear position lamp (paragraph 6.10);

5.14.3. side retro-reflector, non-triangular (paragraph 6.5);

5.14.4. rear retro-reflector, non-triangular (paragraph 6.7);

5.14.5. pedal retro-reflectors (paragraph 6.6), only for mopeds with pedals;

5.14.6. stop lamp (paragraph 6.9);

5.14.7. rear registration plate illuminating device, where such a plate is required (paragraph 6.11).

⁽³⁾ Measurement of the chromaticity coordinates of the light emitted by the lamps is not part of this Regulation.

- 5.15. It may, in addition, be equipped with the following lighting and light-signalling devices:
- 5.15.1. driving beam headlamp (paragraph 6.1);
- 5.15.2. front position lamp (paragraph 6.3);
- 5.15.3. front retro-reflector, non triangular (paragraph 6.4);
- 5.15.4. direction-indicator lamps (paragraph 6.8);
- 5.15.5. vehicle-hazard warning signal (paragraph 6.12).
- 5.16. The fitting of each of the lighting and light-signalling devices mentioned in paragraphs 5.14 and 5.15 above shall be effected in conformity with the relevant requirements in paragraph 6 of this Regulation.
- 5.17. The fitting of any lighting and light-signalling devices other than those mentioned in paragraphs 5.14 and 5.15 is prohibited with the exception of an appropriate illuminating device for the rear-registration plate if it exists and its lighting is required.
- 5.18. Lighting and light-signalling devices type-approved for motorcycles and referred to in sections 5.16 and 5.17 may also be fitted to mopeds.
- 5.19. A device type approved according to any preceding series of amendments to UN Regulations Nos 148 and/or 149 and/or 150 is deemed equivalent to one approved according to the latest series of amendments to the pertinent UN Regulations Nos 148 and/or 149 and/or 150, when the change indexes (defined in UN Regulation No 48) related to each individual lamp (function) do not differ. In this case such a device may be fitted on the vehicle to be type approved without any update of the device type approval documents and device markings.
6. INDIVIDUAL SPECIFICATIONS
- 6.1. Driving beam headlamp
- 6.1.1. Number
- One or two of approved type according to:
- (a) UN Regulation No 113;
- (b) Class A or B of UN Regulation No 112;
- (c) UN Regulation No 1;
- (d) UN Regulation No 57;
- (e) UN Regulation No 72;
- (f) UN Regulation No 76;
- (g) Class A, BS, CS, DS or ES of UN Regulation No 149
- 6.1.2. Arrangement
- No special requirement.
- 6.1.3. Position
- 6.1.3.1. Width
- 6.1.3.1.1. an independent driving lamp may be fitted above or below or to one side of another front lamp: if these lamps are on top of the other the reference centre of the driving lamp must be located within the median longitudinal plane of the vehicle; if these lamps are side by side their reference centre must be symmetrical in relation to the median longitudinal plane of the vehicle.

- 6.1.3.1.2. a driving beam headlamp that is reciprocally incorporated with another front lamp must be fitted in such a way that its reference centre lies within the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with an independent passing beam headlamp or a passing beam headlamp that is reciprocally incorporated with a front position lamp alongside the driving beam headlamp their reference centres must be symmetrical in relation to the median longitudinal plane of the vehicle.
- 6.1.3.1.3. two driving lamps of which either one or both are reciprocally incorporated with another front lamp must be fitted in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.
- 6.1.3.2. Length: at the front of the vehicle. This requirement is regarded as satisfied if the light emitted does not cause discomfort to the driver either directly or indirectly by means of the rear-view mirrors and/or reflective surfaces on the vehicle.
- 6.1.3.3. In any case, the distance between the edge of the illuminating surface of any independent driving lamp and the edge of that of the passing lamp must not exceed 200 mm.
- 6.1.3.4. The distance separating the illuminating surfaces of two driving lamps must not exceed 200 mm.
- 6.1.4. Geometric visibility
The visibility of the illuminating surface, including its visibility in areas which do not appear to be illuminated in the direction of observation considered, shall be ensured within a divergent space defined by generating lines based on the perimeter of the illuminating surface and forming an angle of not less than 5° with the axis of reference of the headlamp.
- 6.1.5. Orientation
Forwards. The lamp(s) may move in line with the steering angle.
- 6.1.6. May not be 'combined' with any other lamp.
- 6.1.7. Electrical connections
The passing beam(s) may remain illuminated with the driving beam(s).
- 6.1.8. 'Circuit-closed' tell-tale
Mandatory, non-flashing blue signal lamp.
- 6.2. Passing beam headlamp
- 6.2.1. Number
One or two of approved type according to:
- (a) UN Regulation No 113;
 - (b) Class A or B of UN Regulation No 112;
 - (c) UN Regulation No 1;
 - (d) UN Regulation No 56;
 - (e) UN Regulation No 57;
 - (f) UN Regulation No 72;
 - (g) UN Regulation No 76;
 - (h) UN Regulation No 82;
 - (i) Class A, AS ^(*), BS, CS, DS or ES of UN Regulation No 149.

(*) Headlamps of Class A of UN Regulation No 113 with LED modules or class AS of UN Regulation No 149 with LED modules only on vehicles with a maximum design speed not exceeding 25 km/h.

6.2.2. Arrangement

No special requirement.

6.2.3. Position

6.2.3.1. Width

6.2.3.1.1. an independent passing lamp may be installed above, below or to one side of another front lamp: if these lamps are one above the other the reference centre of the passing lamp must be located within the median longitudinal plane of the vehicle; if these lamps are side by side their reference centre must be symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.1.2. a passing beam headlamp, that is reciprocally incorporated with another front lamp, must be fitted in such a way that its reference centre lies within the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with an independent driving beam headlamp, or a driving beam headlamp that is reciprocally incorporated with a front position lamp alongside the passing beam headlamp, their reference centres must be symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.1.3. two passing lamps, of which either one or both are reciprocally incorporated with another front lamp must be installed in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.

6.2.3.2. Height: a minimum of 500 mm and a maximum of 1 200 mm above the ground.

6.2.3.3. Length: at the front of the vehicle. This requirement is regarded as satisfied if the light emitted does not cause discomfort to the driver either directly or indirectly by means of the rear-view mirrors and/or reflective surfaces of the vehicle.

6.2.3.4. In the case of two passing lamps the distance separating the illuminating surfaces must not exceed 200 mm.

6.2.4. Geometric visibility

Defined by angles α and β as specified in paragraph 2.8:

$\alpha = 15^\circ$ upwards and 10° downwards;

$\beta = 45^\circ$ to the left and to the right for a single lamp;

$\beta = 45^\circ$ outwards and 10° inwards for each pair of lamps.

The presence of partitions or other items of equipment near the head-lamp shall not give rise to secondary effects causing discomfort to other road users.

6.2.5. Orientation

Forwards. The lamp(s) may move in line with the steering angle.

6.2.6. May not be 'combined' with any other lamp.

6.2.7. Electrical connections

The control for changing over to the passing beam(s) shall switch off the driving beam(s) simultaneously.

6.2.8. Tell tale

Optional, circuit-closed, green, non flashing.

6.3. Front position lamp

6.3.1. Number

One or two.

6.3.2. Arrangement

No special requirement.

6.3.3. Position

6.3.3.1. Width:

an independent front position lamp may be fitted above or below, or to one side of another front lamp: if these lamps are one above the other the reference centre of the front position lamp must be located within the median longitudinal plane of the vehicle; if these lamps are side by side their reference centres must be symmetrical in relation to the median longitudinal plane of the vehicle;

a front position lamp that is reciprocally incorporated with another front lamp must be installed in such a way that its reference centre is situated in the median longitudinal plane of the vehicle. However, when the vehicle is also fitted with another front lamp alongside the front position lamp, their reference centres must be symmetrical in relation to the median longitudinal plane of the vehicle.

Two front position lamps, one or both of them reciprocally incorporated with another front lamp must be installed in such a way that their reference centres are symmetrical in relation to the median longitudinal plane of the vehicle.

6.3.3.2. in height: not less than 350 mm nor more than 1 200 mm above the ground;

6.3.3.3. in length: at the front of the vehicle.

6.3.4. Geometric visibility

the vertical angle: 15° upwards and downwards;

however, the vertical angle below the horizontal may be reduced to 5° if the height of the lamps is less than 750 mm

the horizontal angle: 80° to the left and to the right for a single lamp;

the horizontal angle may be 80° outwards and 45° inwards for each pair of lamps.

6.3.5. Orientation

Forwards. The lamp(s) may move in line with the steering angle.

6.3.6. Tell tale

Either an optional, circuit-closed, green, non-flashing tell tale or instrument illumination.

6.3.7. Other requirements

None.

6.4. Front retro-reflector, non-triangular

6.4.1. Number

One.

6.4.2. Arrangement

No special requirement.

6.4.3. Position

in height: not less than 400 mm nor more than 1 200 mm above the ground;

6.4.4. Geometric visibility

Horizontal angle: 30° to the left and to the right.

Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5°, however, if the height of the reflector is less than 750 mm.

6.4.5. Orientation

Forwards. The reflector may move in line with the steering angle.

6.4.6. Other requirements

None.

6.5. Side retro-reflector, non-triangular

6.5.1. Number per side

One or two.

6.5.2. Arrangement

No special requirement.

6.5.3. Position

6.5.3.1. on the side of the vehicle.

6.5.3.2. in height: not less than 300 mm or more than 1 000 mm above the ground;

6.5.3.3. in length: should be placed in such a position that under normal conditions it may not be masked by the driver's or passenger's clothes.

6.5.4. Geometric visibility

Horizontal angle: 30° to the front and to the rear.

Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5°, however, if the height of the lamp is less than 750 mm.

6.5.5. Orientation

The reference axis of the retro-reflectors must be perpendicular to the vehicle's median longitudinal plane and directed outwards.

The front side retro-reflectors may move with the steering angle.

6.6. Pedal retro-reflectors

6.6.1. Number

Four retro-reflectors or retro-reflector groups.

6.6.2. Arrangement

No special requirement.

6.6.3. Other requirements

The outer faces of the illuminating surface of the retro-reflectors shall be recessed into the body of the pedal.

The retro-reflectors shall be mounted in the pedal body in such a way as to be clearly visible both to the front and to the rear of the vehicle. The reference axis of such retro-reflectors, the shape of which shall be adapted to that of the pedal body, shall be perpendicular to the pedal axis.

Pedal retro-reflectors shall be fitted only to those pedals of the vehicle which, by means of cranks or similar devices, can be used to provide a means of propulsion alternative to the engine. They shall not be fitted to pedals which serve as controls for the vehicle or which serve only as footrests for the rider or passenger.

They shall be visible to the front and the rear.

6.7. Rear retro-reflector, non-triangular

6.7.1. Number

One or two.

6.7.2. Arrangement

No special requirement.

6.7.3. Position

6.7.3.1. in height: not less than 250 mm nor more than 900 mm above the ground.

6.7.3.2. in length: at the rear of the vehicle.

6.7.4. Geometric visibility

Horizontal angle: 30° to left and to right for a single reflector;

30° outwards and 10° inwards for each pair of reflectors;

Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5°, however, if the height of the lamp is less than 750 mm.

6.7.5. Orientation

Rearwards.

6.8. Direction-indicator lamp

6.8.1. Number

Two per side.

6.8.2. Arrangement

Two front indicators (category 11 ⁽ⁱ⁾);

Two rear indicators (category 12⁵).

6.8.3. Position

6.8.3.1. in width:

⁽ⁱ⁾ May be replaced by indicators of categories 1 and 2 respectively of UN Regulations No 6 or No 148.

6.8.3.1.1. For front indicators, the following requirements shall all be met:

- (1) there shall be a minimum distance of 240 mm between illuminating surfaces;
- (2) the indicators shall be situated outside the longitudinal vertical plane tangential to the outer edges of the illuminating surface of the headlamp(s);
- (3) there shall be a minimum distance between the illuminating surface of the indicators and passing beam headlamp closest to one another as follows:

Minimum indicator intensity (cd)	Minimum separation (mm)
90	75
175	40
250	20
400	≤ 20

6.8.3.1.2. For rear indicators, the clearance between the inner edges of the two apparent surfaces shall be at least 160 mm.

6.8.3.2. In height: not less than 350 mm or more than 1 200 mm above the ground.

6.8.3.3. in length: the forward distance between the centre of reference of the rear indicators and the transverse plane which constitutes the rearmost limit of the vehicle's over-all length shall not exceed 300 mm.

6.8.4. Geometric visibility

Horizontal angle: 20° inwards and 80° outwards.

Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5°, however, if the height of the lamp is less than 750 mm.

6.8.5. Orientation

The front indicators may move in line with the steering angle.

6.8.6. May not be 'combined' with any other lamp.

6.8.7. May not be 'reciprocally incorporated' with any other lamp.

6.8.8. Electrical connections

Direction-indicator lamps shall light up independently of the other lamps. All the direction-indicator lamps on one side of a vehicle shall be switched on and off by means of one control.

6.8.9. Other requirements

The characteristics indicated below shall be measured with no other load on the electrical system except that which is required for the operation of the engine and lighting devices.

6.8.9.1. In the case of all vehicles which supply direct current to the direction indicators, the light flashing frequency shall be 90 ± 30 times per minute.

6.8.9.1.1. The flashing of the direction indicators on the same side of the vehicle may occur synchronously or alternately.

- 6.8.9.1.2. Operation of the light-signal control shall be followed within not more than one second by the appearance of the light from any of the indicators and within not more than one-and-a-half seconds by the first extinction of the light.
- 6.8.9.2. In the case of a vehicle which supplied alternating current to the direction indicators, where the speed of the engine is between 50 per cent and 100 per cent of the engine speed corresponding to the maximum design speed of the vehicle; the light flashing frequency shall be 90 ± 30 times per minute.
- 6.8.9.2.1. The flashing of the direction indicators on the same side of the vehicle may occur synchronously or alternately.
- 6.8.9.2.2. Operation of the lamp-signal control shall be followed within not more than one second by the appearance of the light from any of the indicators and within not more than one-and-one-half seconds by the first extinction of the light.
- 6.8.9.3. In the case of a vehicle which supplies alternating current to the direction indicators, where the speed of the engine is between the idling speed indicated by the manufacturer and 50 per cent of the engine speed corresponding to the maximum speed of the vehicle, the lamp flashing frequency shall be between 90 ± 30 and $90 - 45$ times per minute;
- 6.8.9.3.1. The flashing of the direction indicators on the same side of the vehicle may occur synchronously or alternately.
- 6.8.9.3.2. Operation of the lamp-signal control shall be followed within not more than one second by the appearance of the light from any of the indicators and within not more than one-and-one-half seconds by the first extinction of the light.
- 6.8.10. In the event of failure, other than a short circuit, of one direction indicator lamp, the other must continue to flash or remain alight but the frequency in this condition shall be different from that prescribed, unless the vehicle is equipped with a tell-tale.
- 6.8.11. Tell tale
Mandatory if the direction indicators are not visible to the rider: operational, green, flashing and/or audible. In the event of an indicator malfunction the tell tale shall; go off, stay on or change frequency.
- 6.9. Stop lamp
- 6.9.1. Number
One or two.
- 6.9.2. Arrangement
No special requirement.
- 6.9.3. Position
- 6.9.3.1. in height: not less than 250 mm or more than 1 500 mm above the ground;
- 6.9.3.2. in length: at the rear of the vehicle.
- 6.9.4. Geometric visibility
- Horizontal angle: 45° to left and to right for a single lamp:
 45° outwards and 10° inwards for each pair of lamps:
- Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5° , however, if the height of the lamp is less than 750 mm.

6.9.5. Orientation

Rearwards.

6.9.6. Electrical connections

Shall light up at any service brake application.

6.9.7. Other requirements

The luminous intensity of the stop lamp shall be markedly greater than that of the rear position lamp.

6.9.8. Tell tale

Prohibited.

6.10. Rear position lamp

6.10.1. Number

One or two.

6.10.2. Arrangement

No special requirement.

6.10.3. Position

6.10.3.1. in height: not less than 250 mm nor more than 1 500 mm above the ground;

6.10.3.2. in length at the rear of the vehicle.

6.10.4. Geometric visibility

Horizontal angle: 80° to left and to right for a single lamp:

the horizontal angle may be 80° outwards and 45° inwards for each pair of lamps:

Vertical angle: 15° above and below the horizontal.

The vertical angle below the horizontal may be reduced to 5°, however, if the height of the lamp is less than 750 mm.

6.10.5. Orientation

Rearwards.

6.10.6. Tell tale

Optional, shall be combined with that for the front position lamp.

6.10.7. Other requirements

None.

6.11. Rear-registration-plate illuminating device

6.11.1. Number

One. The device may consist of several optical components designed to illuminate the space reserved for the registration plate.

- 6.11.2. Arrangement)
)
- 6.11.3. Position)
)
- 6.11.3.1. in width:)
)
- 6.11.3.2. in height:) Such that the device illuminates the
space reserved for the registration plate.
)
- 6.11.3.3. in length:)
)
- 6.11.4. Geometric visibility)
)
- 6.11.5. Orientation)
- 6.11.6. Tell-tale
Optional: Its function shall be performed by the tell-tale prescribed for the position lamp.
- 6.11.7. Other requirements
When the rear registration plate lamp is combined with the rear position lamp, reciprocally incorporated in the stop lamp, the photometric characteristics of the rear registration plate lamp may be modified during the illumination of the stop lamp.
- 6.12. Vehicle-hazard warning signal
- 6.12.1. The signal shall be given by simultaneous operation of the direction-indicator lamps in accordance with the requirements of paragraph 6.8 above.
- 6.12.2. Electrical connections
The signal shall be given by means of a separate control enabling all the direction-indicators to be supplied with current simultaneously.
- 6.12.3. 'Circuit-closed' tell-tale
Mandatory flashing red signal lamp or, in the case of separate tell-tales, the simultaneous operation of the tell-tale prescribed in paragraph 6.8.11.
- 6.12.4. Other requirements
Light flashing 90 ± 30 times per minute.
Operation of the lamp-signal control shall be followed within not more than one second by the appearance of the light and within not more than one-and-a-half seconds by the first extinction of the light.
7. REGISTRATION OF VEHICLES
Nothing shall prevent a Government from requiring or prohibiting the presence of a driving lamp as mentioned in paragraph 5.15.1 on vehicles registered in its territory, provided that it so notifies the Secretary-General of the United Nations at the time of its communication the application of this Regulation.
8. CONFORMITY OF PRODUCTION
The conformity of production procedures shall comply with those set out in the Agreement, Appendix 2 (E/ECE/324-E/ECE/TRANS/505/Rev.2), with the following requirements:

- 8.1. Mopeds approved under this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements set out in paragraphs 5 and 6 above.
- 8.2. The minimum requirements for conformity of production control procedures set forth in Annex 5 to this Regulation shall be complied with.
- 8.3. The authority which has granted type approval may at any time verify the conformity control methods applied in each production facility. The normal frequency of these verifications shall be once a year.
9. PENALTIES FOR NON-CONFORMITY OF PRODUCTION
 - 9.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements set forth above are not met.
 - 9.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a communication form conforming to the model in Annex 1 to this Regulation.
10. MODIFICATION AND EXTENSION OF APPROVAL OF A VEHICLE TYPE WITH REGARD TO THE INSTALLATION OF LIGHTING AND LIGHT-SIGNALLING DEVICES
 - 10.1. Every modification of the vehicle type shall be notified to the Type Approval Authority which approved that vehicle type. The Authority may then either:
 - 10.1.1. Consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the vehicle still complies with the requirements; or
 - 10.1.2. Require a further test report from the Technical Service responsible for conducting the tests.
 - 10.2. Confirmation or refusal of approval, specifying the alterations shall be communicated by the procedure specified in paragraph 4.3 above to the Parties to the Agreement which apply this Regulation.
 - 10.3. The Competent Authority issuing the extension of approval shall assign a series number for such an extension and inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.
11. PRODUCTION DEFINITELY DISCONTINUED

If the holder of the approval completely ceases to manufacture a vehicle type approved in accordance with this Regulation, he shall so inform the authority which granted the approval. Upon receiving the relevant communication that authority shall inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.
12. TRANSITIONAL PROVISIONS
 - 12.1. As from the official date of entry into force of the 01 series of amendments, no Contracting Party applying this Regulation shall refuse to grant approvals under this Regulation as amended by the 01 series of amendments.
 - 12.2. As from 24 months after the date of entry into force mentioned in paragraph 12.1 above, Contracting Parties applying this Regulation shall grant approvals only if the vehicle type with regard to the number and mode of installation of the lighting and light-signalling devices corresponds to the requirements of the 01 series of amendments to this Regulation.
 - 12.3. Existing approvals granted under this Regulation before the date mentioned in paragraph 12.2 above shall remain valid. In the case of vehicles first registered more than four years after the date of entry into force mentioned in paragraph 12.1 above Contracting Parties applying this Regulation may refuse the vehicle type with regard to the number and mode of installation of the lighting and light-signalling devices which do not meet the requirements of the 01 series of amendments to this Regulation.

13. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF TYPE APPROVAL AUTHORITIES

The Parties to the Agreement which apply this Regulation shall communicate to the United Nations Secretariat the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or refusal or withdrawal of approval, issued, in other countries, are to be sent.

ANNEX 1

COMMUNICATION

(maximum format: A4 (210 × 297 mm))



issued by: Name of administration:

.....

Concerning ⁽²⁾:

Approval granted

Approval extended

Approval refused

Approval withdrawn

Production definitively discontinued

of a vehicle type (moped) with regard to the installation of lighting and light-signalling devices pursuant to Regulation No 74

Approval No: ...

Extension No: ...

1. Trade name or mark of the vehicle:
2. Vehicle type:
3. Manufacturer's name and address:
4. If applicable, name and address of manufacturer's representative.....
5. Lighting devices on the vehicles submitted for approval ⁽³⁾, ⁽⁴⁾
 - 5.1. Driving lamp: yes/no²
 - 5.2. Passing lamp: yes/no²
 - 5.3. Front position lamp: yes/no²
 - 5.4. White front retro-reflector, non-triangular: yes/no²
 - 5.5. Amber side retro-reflectors, non-triangular: yes/no²
 - 5.6. Amber pedal retro-reflectors: yes/no²
 - 5.7. Rear red retro-reflector, non-triangular: yes/no²

⁽¹⁾ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

⁽²⁾ Strike out what does not apply.

⁽³⁾ Show for each device, on a separate form (list prescribed in paragraph 3.2.2 of this Regulation), the types of devices, duly identified, meeting the installation requirements of this Regulation.

⁽⁴⁾ Attach diagrams of the vehicles, as indicated in paragraph 3.2.3 of this Regulation.


- 5.8. Direction-indicator lamp: yes/no²
- 5.9. Stop lamp: yes/no²
- 5.10. Rear position lamp: yes/no²
- 5.11. Rear-registration-plate illuminating device: yes/no²
6. Maximum design speed: km/h
7. Variants:
8. Vehicle submitted for approval on:
9. Technical Service responsible for conducting approval tests:
10. Date of report issued by that service:
11. Number of report issued by that service:
12. Approval granted/refused/extended/withdrawn²
13. Reason(s) of extension (if applicable):
14. Position of approval mark on the vehicle:
15. Place:
16. Date:
17. Signature:
-

ANNEX 2

ARRANGEMENT OF APPROVAL MARKS

Model A

(see paragraph 4.4 of this Regulation)

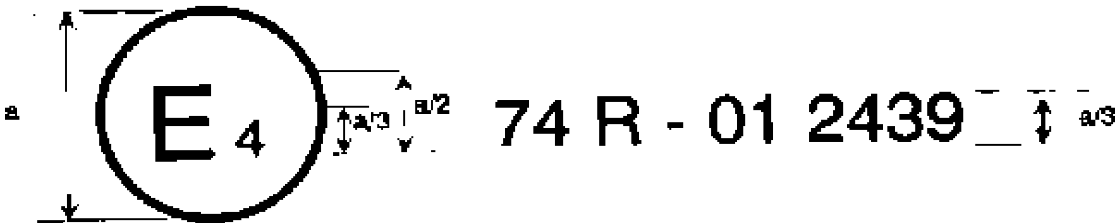


a = 8 mm min.

The above approval mark affixed to a moped shows that the vehicle type concerned has, with regard to the installation of lighting and light-signalling devices, been approved in the Netherlands (E4), pursuant to Regulation No 74 under approval number 01 2439. The first two digits of the approval number indicate that the approval was granted in accordance with the requirements of Regulation No 74, as amended by the 01 series of amendments.

Model B

(See paragraph 4.5 of this Regulation)

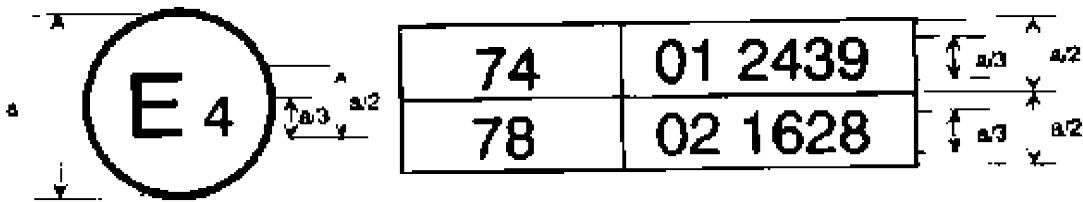


a = 8 mm min.

The above approval mark affixed to a moped shows that the vehicle type concerned has been approved in the Netherlands (E4) pursuant to Regulations Nos 74 and 78 ⁽¹⁾. The approval numbers indicate that, at the dates when the respective approvals were given, Regulation No 74 included the 01 series of amendments and Regulation No 78 already included the 02 series of amendments.

⁽¹⁾ The latter is given merely as an example.

ANNEX 3

LAMP SURFACES, AXIS AND CENTRE OF REFERENCE, AND ANGLES OF GEOMETRIC VISIBILITY

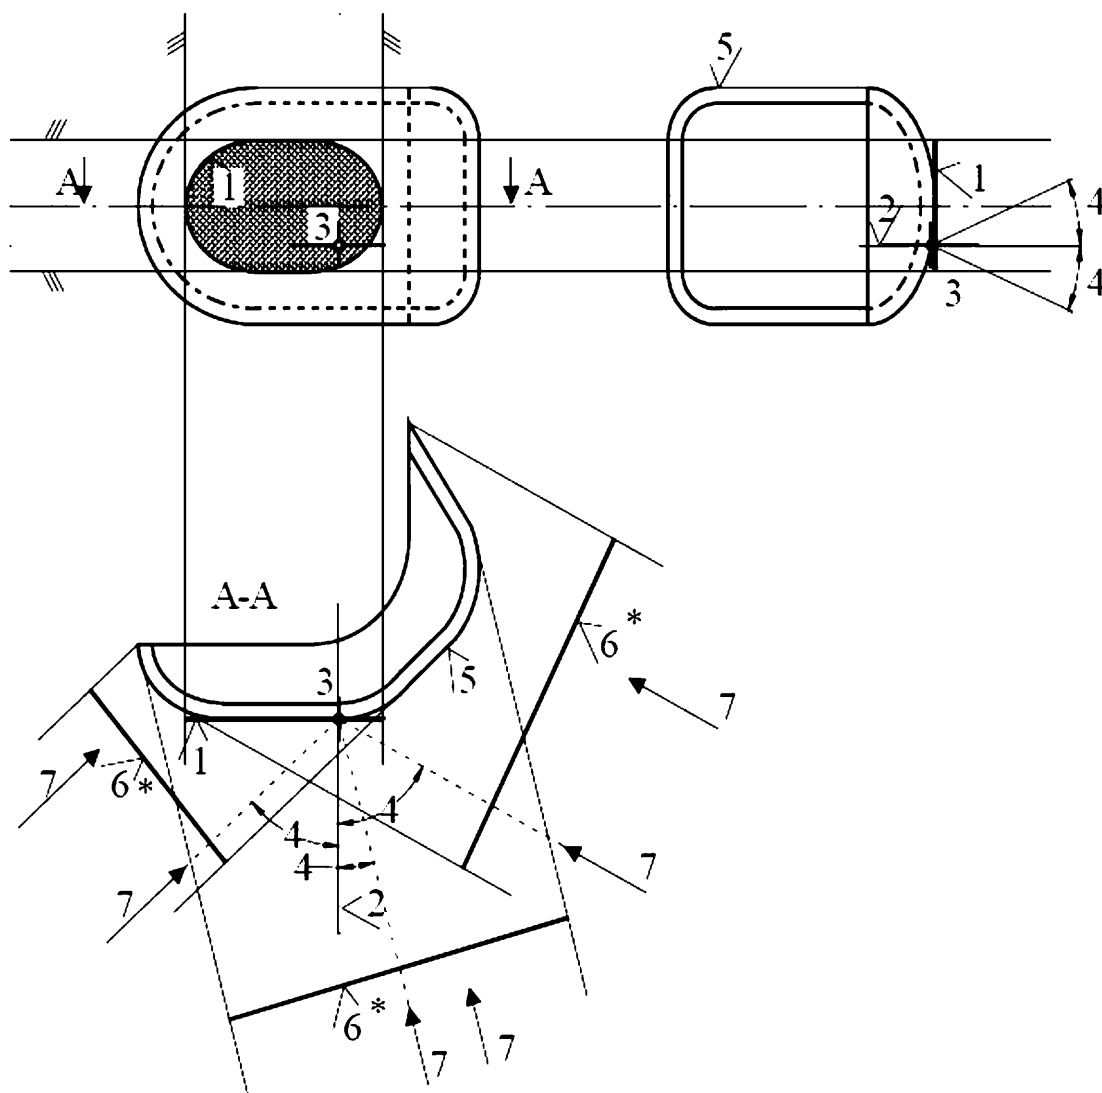

* This surface is to be considered as tangent to the light-emitting surface


Key

1. Illuminating surface
2. Axis of reference
3. Centre of reference
4. Angle of geometric visibility
5. Light-emitting surface
6. Apparent surface
7. Direction of observation

Illuminating surface in comparison with light-emitting surface


(See paragraphs 2.8 and 2.9 of this Regulation)

Sketch A

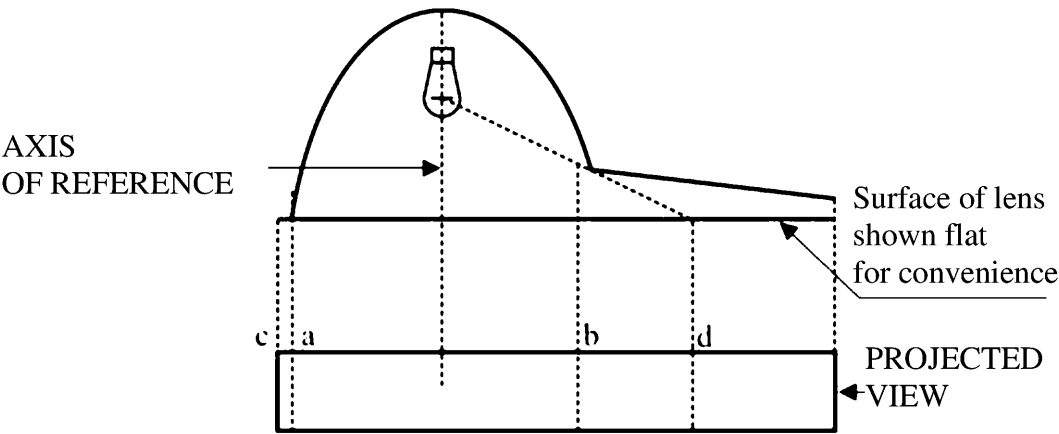

	Illuminating surface	Light-emitting surface
Edges are	a and b	c and d

Sketch B

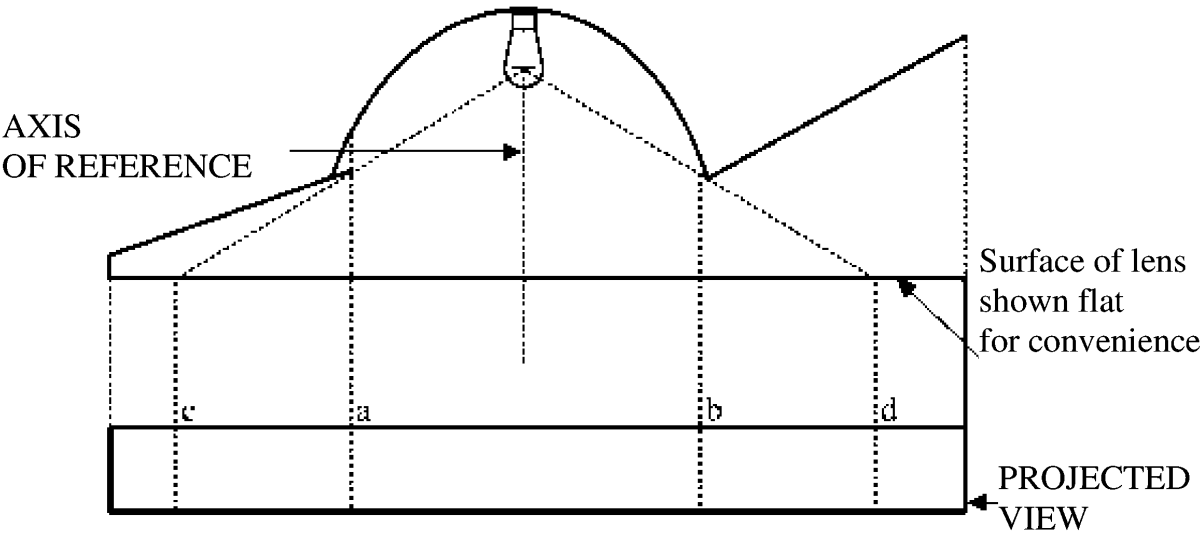

	Illuminating surface	Light-emitting surface
Edges are	a and b	c and d

ANNEX 4

FORWARD VISIBILITY OF RED LIGHTS AND REARWARD VISIBILITY OF WHITE LIGHTS

(See paragraph 5.9 of this Regulation)

Figure 1

Forward visibility of a red light


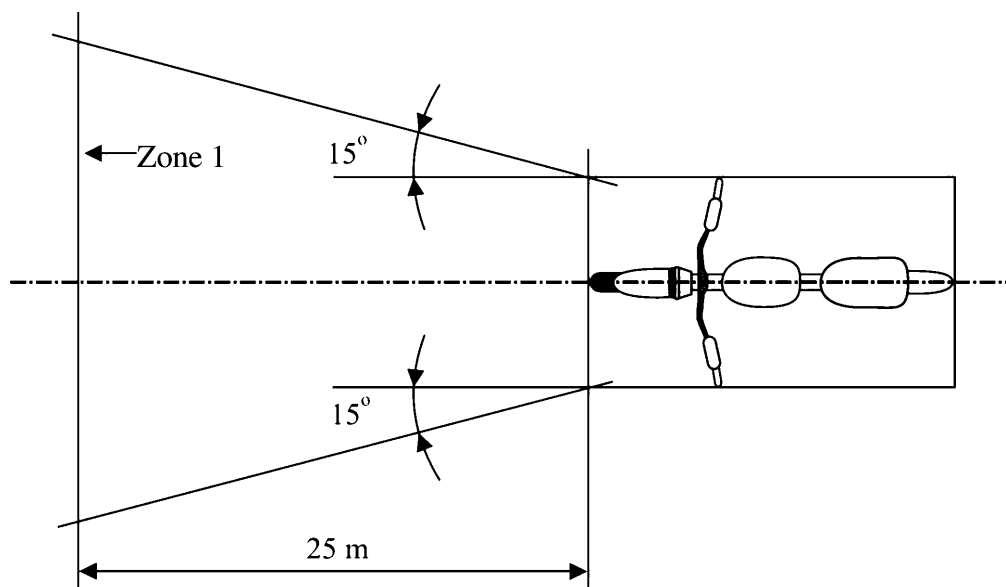


Figure 2

Rearward visibility of a white light

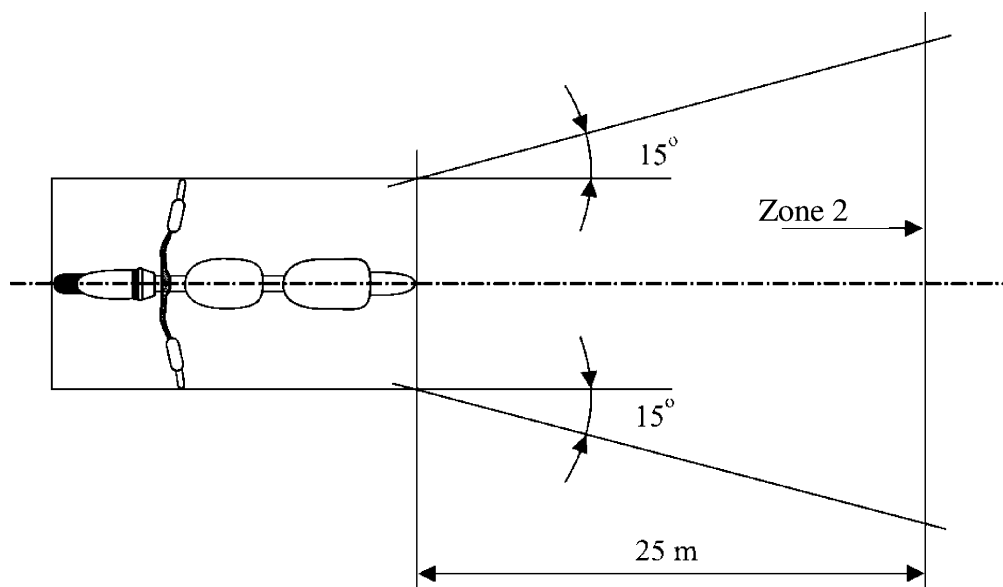

ANNEX 5

CONTROL OF CONFORMITY OF PRODUCTION

1. Tests

1.1. Position of lamps

The position of the lamps as specified in paragraph 6 shall be checked in accordance with the general requirements set out in paragraph 5 of this Regulation.

The values measured for the distances shall be such that the individual specifications applicable to each lamp are fulfilled.

1.2. Visibility of lamps

1.2.1. The angles of geometric visibility shall be checked in accordance with paragraph 2.8 of this Regulation.

The values measured for the angles shall be such that the individual specifications applicable to each lamp are fulfilled except that the limits of the angles may have an allowance corresponding to the $\pm 3^\circ$ variation permitted in paragraph 5.3 for the mounting of the light-signalling devices.

1.2.2. The visibility of red light towards the front and of white light towards the rear shall be checked in accordance with paragraph 5.9 of this Regulation.

1.3. Electrical connections and tell-tales

The electrical connections shall be checked by switching on every lamp supplied by the electrical system of the moped. The lamps and tell-tales shall function in accordance with the provisions set out in paragraph 5.10 of this Regulation and with the individual specifications applicable to each lamp.

1.4. The presence number, colour, arrangement and, where applicable, the category of lamps shall be checked by visual inspection of the lamps and their markings.

These shall be such that the requirements set out in paragraph 5.13 and the individual specifications applicable to each lamp are fulfilled.

CORRIGENDA

Corrigendum to Council Decision (EU) 2019/1355 of 15 July 2019 on the position to be taken on behalf of the European Union in the EPA Committee established under the stepping stone Economic Partnership Agreement between Côte d'Ivoire, of the one part, and the European Community and its Member States, of the other part, as regards the adoption of Protocol 1 concerning the definition of the concept of 'originating products' and methods of administrative cooperation

(Official Journal of the European Union L 222 of 26 August 2019)

(1) On page 12, draft Decision No .../2019 of the EPA Committee, Annex, Article 7(3), point (b):

for: ' (b) Côte d'Ivoire and the European Union provide each other, through the European Commission and the Economic Community of the West African States (ECOWAS) Commission, with the details of agreements ...',

read: ' (b) Côte d'Ivoire and the European Union provide each other, through the European Commission and the EPA National Commission, with the details of agreements ...';

(2) on page 25, draft Decision No .../2019 of the EPA Committee, Annex, Article 33(1):

for: '1. Côte d'Ivoire and the Member States of the European shall provide each other, via the European Commission and the ECOWAS Commission, with the addresses of the customs authorities competent to issue and verify movement certificates EUR.1, origin declarations and supplier's declarations, and with specimens of the stamps used in the customs offices for the issue of those certificates.

Movement certificates EUR.1 and origin declarations or supplier's declarations shall be accepted for the purpose of applying preferential treatment from the date the information is received by the European Commission and the ECOWAS Commission.'

read: '1. Côte d'Ivoire and the Member States of the European shall provide each other, via the European Commission and the EPA National Commission, with the addresses of the customs authorities competent to issue and verify movement certificates EUR.1, origin declarations and supplier's declarations, and with specimens of the stamps used in the customs offices for the issue of those certificates.

Movement certificates EUR.1 and origin declarations or supplier's declarations shall be accepted for the purpose of applying preferential treatment from the date the information is received by the European Commission and the EPA National Commission.'

Corrigendum to Commission Implementing Decision (EU) 2019/2193 of 17 December 2019 laying down rules for the calculation, verification and reporting of data and establishing data formats for the purposes of Directive 2012/19/EU of the European Parliament and of the Council on waste electrical and electronic equipment (WEEE)

(Official Journal of the European Union L 330 of 20 December 2019)

On page 77, in Annex II, Table 1 should read as follows:

Table 1

Electrical and electronic equipment (EEE) placed on the market, waste electrical and electronic equipment (WEEE) generated and collected and WEEE collection rate

Product category	1	2	3	4	5	6	
	EEE placed on the market (POM)	WEEE Generated	WEEE collected from private households	WEEE collected from users other than private households	Total WEEE collected	WEEE collection rate (%)	
						Methodology	
	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	A. based on POM (%)	B. based on WEEE generated (%)
1. Temperature exchange equipment							
2. Screens, monitors, and equipment containing screens having a surface greater than 100 cm ²							
3. Lamps							
4. Large equipment ⁽¹⁾ (any external dimension more than 50 cm)							
4a. Large equipment excluding photovoltaic panels ⁽¹⁾							
4b. Photovoltaic panels ⁽¹⁾							
5. Small equipment (no external dimension more than 50 cm)							
6. Small IT and telecommunication equipment (no external dimension more than 50 cm)							

	1	2	3	4	5	6	
Product category	EEE placed on the market (POM)	WEEE Generated	WEEE collected from private households	WEEE collected from users other than private households	Total WEEE collected	WEEE collection rate (%)	
						Methodology	
	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	Total weight (tonnes)	A. based on POM (%)	B. based on WEEE generated (%)
Total							

(¹) For the purposes of reporting, category 4 of large equipment shall be divided into sub-category “4a: Large equipment excluding photovoltaic panels” and sub-category “4b: Photovoltaic panels”. Member States shall report data under the sub-categories 4a and 4b and keep the aggregate line for category 4 empty. If a Member State is not able to distinguish data under sub-categories 4a and 4b, it shall complete the cells in the different columns in aggregate line for category 4 only.

Notes:

- Light grey boxes mean that reporting of the related data is voluntary.
- Dark grey boxes mean that reporting of the related data may be obligatory or voluntary, pursuant to Article 2(6) of Commission Implementing Decision (EU) 2019/2193 of 17 December 2019 laying down rules for the calculation, verification and reporting of data and establishing data formats for the purposes of Directive 2012/19/EU of the European Parliament and of the Council on waste electrical and electronic equipment (WEEE) (OJ L 330, 20.12.2019, p. 72).
- Member States shall distinguish between real zeros (0 tonnes) and missing values/unknown amounts. They shall enter “0” to report zero tonnes and “M” where data is unknown.’

ISSN 1977-0936 (electronic edition)
ISSN 1725-2431 (paper edition)



Publications Office of the European Union
2985 Luxembourg
LUXEMBOURG

EN